



Innovative Solutions For
Telecommunications - Utilities - Electrical - Tree Care - Construction - Mining - Military



Inside Wiring - Underground Cabling and Locating - Tree Care
Aerial Cable Placement - Lighting





Mission

Jameson is committed to consistently providing world class quality products and service to our customers. A leader in technology and innovation, we are dedicated to creating advanced solutions for our customers and have been doing so since 1956.

A Market Leader In

Telecommunications - Utilities - Electrical - Tree Care - Mining - Construction - Military

Core Purpose

The development, manufacture, and continuous improvement of world class products to better serve our customers.

Distinction

Understanding our customers' work environment and challenges allows us to develop solution-based products that perform safely and effectively. Commitment to our customers drives us to continually improve our products and service.



Jameson Corporate Headquarters

1451 Old North Main Street, Clover, South Carolina
800.346.1956



Jameson Utah Division

1472 West 105 North in Orem, Utah
877.306.0078

Customer Service and Sales

803.222.6400 800.346.1956
sales@jamesonllc.com

Notice

The information in this catalog is effective June 2014 and supersedes all previous catalogs. Since product improvement is a continual process at Jameson, specifications are subject to change without notice.



See Our Full Line Of Products At
WWW.JAMESONLLC.COM



**Patents**

Splice Joint Lock	4,329,078
Replaceable Scuff Guard for Work Light	4,945,461
Fish Tape Reel & Reel Assembly	5,106,056
	5,201,495
Fish Tape Reel & Reel Assembly with Detachable Accessory Storage	5,340,084
Shock Absorbing Bulb Socket for Light	5,564,821
Hand-Held Fluorescent Light	5,738,438
Hand-Held Fluorescent Light with Shock Absorbing Bulb Socket	5,860,730
Scissors (Design)	D445,010
Scissor Handle (Design)	D445,324
Retrofit Handle Attachment for Scissors	6,272,754
Portable Reduced Emissions Work Light	7,712,916
Fish Tape with Longitudinal Reinforcing Ribs	6,598,860
Cable Pulley Device and Method	5,618,031
Cable Pulley Device and Method	5,735,505
Cable Pulley Device	6,045,124
Task Light	D579,605
Task Light	D590,987
Task Light	D602,197
Portable Reduced Emissions Work Light	7,282,006

Patents Pending

Aerial Cable Marker Placement Tool
Cable Marker Placement Tool and Method
Portable LED Tube Light
Task Light
Tracing a Conduit
Aerial Sheave

Trademarks

Safe-Stik®
Handi-Light®
PAXLight®
Buddy® System
Stubby Light®
2nd MAN®
Jameson®
Data Lynx™
Easy Rider™
Versa™ Block
Duct Hunter™
Live Tracer™
Cero®
X-D Lock®

Any unauthorized use of these trademarks without the express written consent of Jameson is strictly prohibited.

Inside Wiring

Buddy® Fish Tapes	2-3
Microduct Fisher	4
Flexi-Magnet	4
2nd Man Cable Pulley	5
Glow Fish Rods	6-7
Splicer Scissors and Knives	8-10

Underground Cabling and Locating

Buddy® Rodders	11-15
Duct Hunter™ Traceable Rodders	16-18
Live Tracer - Water	19-20
Live Tracer - Gas	21-22
Cable and Pipe Locators	23
Sonde & Adapters	24

Fiberglass Poles and Lay Up Sticks

Poles Overview	25-26
JE Foam Core	27
FG Hollow Core	27
BL Lightweight Poles	28
LS Landscaper	28
Telescoping Poles	29

Tree Care - Line Clearance - Landscaping

Pruners	30-31
Pole Saws	32
Saw Blades	33
Hand Saws	34
Tree Trimming Packages	35
Pole Accessories	36-37

Aerial Bucket and Boom Tool Holders

Bucket and Boom Tool Holders	38-40
Canvas Tool Bags	41

Aerial Cable Placement Tools

Corner Blocks and Pole Mount Brackets	42
Stringing and Overlash Blocks	43
Telescoping Measuring Poles	44

Lighting

Handheld Portable Work Lights	46-48
Stringable Shelter Lights	49
Cero® LED Lights	50-51

Parts

Replacement Parts	52-53
-------------------	-------



1/8"
OD ROD
.080" Core

Inside Wiring In Occupied Conduit As Small As 1/2"

The Wee Buddy's round rod slides easily over existing wires, especially at bends, and has a smooth, non-binding payout and return to canister.

Easy grip design allows for more efficient pushing and pulling when fishing telecom, voice, data or electrical conduit.

Patented canister features snap-on accessory kit.

- Recommended Conduit: 1/2"+
- Bend Radius: 1-1/2"
- Pull/Tensile Strength: 200-lb
Strength rating of rod/end ferrule interface. Actual fiberglass rod has higher ultimate tensile strength
- Available With or Without Accessory Kit
- Dimensions: 12.5" Diameter x 2"

Part Number	Wee Buddy®
8-18-50	50' X 1/8" Wee Buddy
8-18-50K	50' X 1/8" Wee Buddy with Kit
8-18-100	100' X 1/8" Wee Buddy
8-18-100K	100' X 1/8" Wee Buddy with Kit
8-18-150	150' X 1/8" Wee Buddy
8-18-150K	150' X 1/8" Wee Buddy with Kit



Without Accessory Kit



With Accessory Kit



Wee Buddy® Accessories



Accessory Kit
Snaps On Canister for Easy Access



Flexible Spring Leader
Guides Rod Through Bends,
Sweeps, Misalignments

Part Number	Wee Buddy® Accessories	
8-160	Pulling Eye	Attaches to end fitting of rod for pull line attachment to rod
8-162	Large Spring Leader	Guides rod through bends, sweeps and misalignments
8-163	Small Spring Leader	
8-140	Splice Repair Kit	Splice Ferrule, Adhesive, Emery Cloth
8-146	End Ferrule Repair Kit	End Ferrule, Adhesive, Emery Cloth
8-18-AK	Accessory Kit	Small Leader, Large Leader, 2 Pulling Eyes, 2 Splice Ferrules, 2 End Ferrules, Adhesive, Emery Cloth, Plastic Case



Fishes Conduit 3/4" To 1-1/2"

Lightweight, portable unit for running inside and outside conduit drops; home drops from the hand-hole box to a building; and light pole and control wiring or walker ducts.

Operates vertically or horizontally.

Drag brake and safety feed eye to control payout.

- Bend Radius: 2.5"
- Pull/Tensile Strength: 200-lb
Strength rating of rod/end ferrule interface.
Actual fiberglass rod has higher ultimate tensile strength
- Accessory Kit included
- Dimensions: 22" x 17" x 7"



3/16"
OD ROD
.130" Core

Part Number	Little Buddy®
10-316-150	150' X 3/16" Little Buddy
10-316-200	200' X 3/16" Little Buddy
10-316-250	250' X 3/16" Little Buddy
10-316-300	300' X 3/16" Little Buddy

Little Buddy® Accessories



Part Number	Little Buddy® Accessories	
10-160	Pulling Eye	Attach to end fitting of rod for pull line attachment to rod
10-162	Flexible Leader w/Pull Eye	Guide rod through bends, sweeps and misalignments
10-163	Flexible Leader w/Ball Tip	
10-140	Splice Repair Kit	Splice Ferrule, Adhesive, Emery Cloth
10-146	End Ferrule Repair	End Ferrule, Adhesive, Emery Cloth
10-316-AK	Accessory Kit	2 Pulling Eyes, 2 Leaders, Splice Ferrule, 2 End Ferrules, Adhesive, Emery Cloth, Pouch



Accessory Kit
Attaches To Canister's Frame For Easy Access

Buddy® Fish Tapes



Lightweight Canister With Easy-Grip Design
12.5" Diameter X 2" Width

1/8"
OD ROD
.080" Core



Microduct
FISHER™
For Fiber Microducts
BY JAMESON

For Fishing In Fiber Microduct

Jameson's Microduct Fisher features all fiberglass rod construction for safety and easy handling.

The low profile pulling eye is permanently mounted on the rod to move smoothly in fiber microducts as small as 6 mm, where traditional fish tapes are too large.

Smooth, round polymer jacket will not nick or scratch fiber or duct wall.

- 1/8" OD Fiberglass Rod
- 1.5" Bending Radius
- Permanent mount pulling eye
- Low profile tip moves easily in microduct

Microduct Fisher II

Reel models feature longer length rod and convenient carrying handle.

Available in Handheld or Stand Model

Part Number	Microduct Fisher
8-18-165MDR	165' X 1/8" Microduct Fisher
10-18-350MDR	300' X 1/8" Microduct Fisher II, Handheld
10-18-350MDRS	350' X 1/8" Microduct Fisher II, Stand
8-146MDR	Pulling Eye Repair Kit
8-140MDR	Splice Repair Kit



Reel Models
17" Diameter X 7" Width

Flexi-Magnet

Bendable retriever features a powerful magnetic tip that grabs chain inside wall to pull wire.

Includes 10' length of ball chain with ring to hold in place.

Available separately or as a kit.

Part Number	Flexi-Magnet
7-07A	Flexi-Magnet Kit (Retriever and Ball Chain with Ring)





Now One Technician Can Do The Job Of Two!

The 2nd MAN™ Cable Pulley is designed to accommodate eight (8) four pair, Cat 5e, Cat 6, and fiber-optic cable.

With strategic placement, the 2nd MAN™ can increase efficiency and safety during installation.

It also helps preserve the cable's integrity during and after installation by maintaining proper bend radius and pulling force.



Cable Installation

- Hang a 2nd MAN™ above drop ceiling to receive cable from supply side of pull.
- Hang a 2nd MAN™ at each horizontal turn, elevation change and up-and-down location.
- Use it to line up cable being pulled into a conduit; cable travels in a straight line between pulleys.
- Make a horizontal 90 degree turn (or any turn), eliminating the need to bring cable down through the ceiling, place it on the floor and then feed it back up through the ceiling to make the turn.

Cable Hanger

- Saves time by already being in place.
- Non-plenum for use in the appropriate air-handling space.
- Cost competitive with other cable hanger devices and a greater value because it is an installation tool that doubles as a hanger device.


Protects Cable

- Protects cable by maintaining proper bend radius.
- Helps ensure recommended pulling force is not exceeded.
- Eliminates safety hazard of cable strung out on floor and potential cable damage.
- Friction on the cable is virtually eliminated because cable does not slide across the wheel of the pulley - wheel turns with the cable. The 2nd MAN™ eliminates corner drag.



Material: Injection Molded Nylon (Non-Plenum)
 Weight: 1/4 lb.
 Load Capacity: 30 lbs.
 Wheel Diameter: 4" outside and 2.3" inside
 Wheel Width: 1.13" inside
 Length from axle pin to loop in strap 7.25"
 Length from bottom of wheel to loop in strap 9.25"

Part Number	
3241-2R	2nd MAN Cable Pulley - Two Pack
3241-2RB	2nd MAN Cable Pulley - 5 Two Packs in Counter Display
3241-6	2nd MAN Cable Pulley - Six Pack

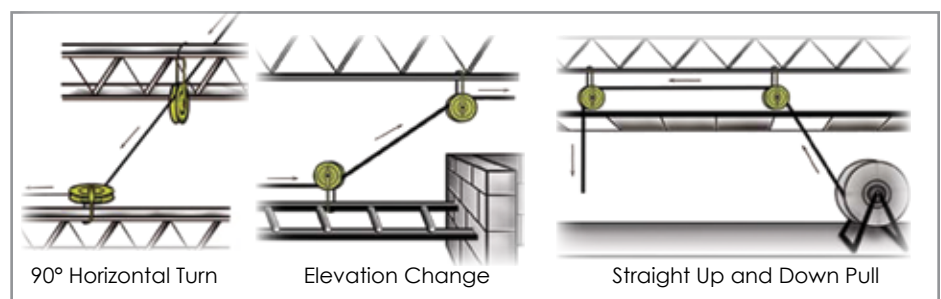

Glow Rod

Non-Conductive Fiberglass Rods For Wiring

With our proprietary luminescent resin, Jameson is the original manufacturer of fiberglass glow rods.

These non-conductive rods are perfect for drop ceilings, attics, floors, walls, and crawl spaces. Their high strength and flexibility handle turns easily without breaking.


Designed for maximum versatility, threaded ferrules make it possible to customize rod length to any job and a variety of accessories make it easier to handle any wiring situation.

What Size Do You Need?

Flexibility increases as rod diameter decreases:

- 1/4" for long spans requiring greater rigidity
- 3/16" for short spans or in limited space
- 5/32" for making tight turns

With same size ferrule threads (#8-32), different diameter rods can be used together in any combination for ultimate on-the-job customization.

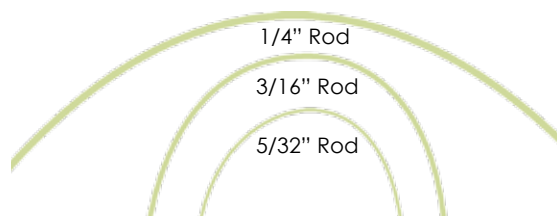

1/4" Diameter

Most Rigid
Used For Long Spans
Minimum Bend Radius: 6"
Tensile/Pull Strength: 750-lbs

Part Number	Total Rod Length	Package Length	1/4" Glow Rod Kits
7-36-23T	24'	6'	Three 6' X 1/4" Rods, Two 3' X 1/4" Rods One Bullet Nose with Eyelet, One Hook
7-63T	18'	3'	Six 3' X 1/4" Rods One Bullet Nose with Eyelet, One Hook
7-34T	12'	4'	Three 4' X 1/4" Rods One Bullet Nose with Eyelet, One Hook
7-6	6'	*	One 6' X 1/4" Replacement Rod with Male and Female Ferrules

* Single rods are shipped with hanging tag, not in plastic kit tube



3/16" Diameter

More Flexible
For Short Runs Or In Limited Space
Minimum Bend Radius: 4"
Tensile/Pull Strength: 500-lbs

Part Number	Total Rod Length	Package Length	3/16" Glow Rod Kits
7S-45T	20'	5'	Four 5' X 3/16" Rods One Bullet Nose with Eyelet, One Hook
7S-718T	10.5'	18"	Seven 18" X 3/16" Rods One Bullet Nose with Eyelet, One Hook
7S-5	5'	*	One 5' X 3/16" Replacement Rod with Male and Female Ferrules



* Single rods shipped with hanging tag, not in plastic kit tube





Glow Fish Rods

5/32" Diameter

 7SS-36T  7SS-6 Permanently mounted bullet nose on each end.	Part Number	Total Rod Length	Package Length	5/32" Glow Rod Kits
	7SS-36T	18'	6'	Three 6' X 5/32" Rods One Bullet Nose with Eyelet, One Hook
	7SS-6	6'	*	One 6' X 5/32" Rod with Permanently Mounted Bullet Nose with Eyelet On Each End of Rod * Single rods shipped with hanging tag, not in clear plastic kit tube

Smallest Diameter Offers Extreme Flexibility With High Strength.
Ideal For Security and Alarm, Home Theater, CATV, Satellite Installation


Minimum Bend Radius: 3.5"
Tensile/Pull Strength: 300-lbs

Combo Kits

	Part Number	Total Rod Length	Package Length	Installer's Kit
	7-8-IK	35'	6'	Two 1/4" X 5' Rods, Two 1/4" X 2.5' Rods, Four 3/16" X 5' Rods Two Bullet Nose with Eyelet, Two Hooks, One Whisk
	Part Number	Total Rod Length	Package Length	Deluxe Kit
	7S-65K	30'	6'	Six 3/16" X 5' Rods One Bullet Nose with Eyelet, One Hook, One Whisk, One Ball Chain Bullet Nose
	Part Number	Total Rod Length	Package Length	Versa Kit
	7-8-VK	34'	6'	Two 1/4" X 6' Rods, Two 3/16" X 5' Rods, One 5/32" X 6' Rod One 5/32" X 6' Rod - Permanently Mounted Bullet Eye On Each End One Hook, One Whisk

Kits Include A Variety Of Rod Sizes And Accessories For Greater Versatility On The Job

Glow Rod Accessories

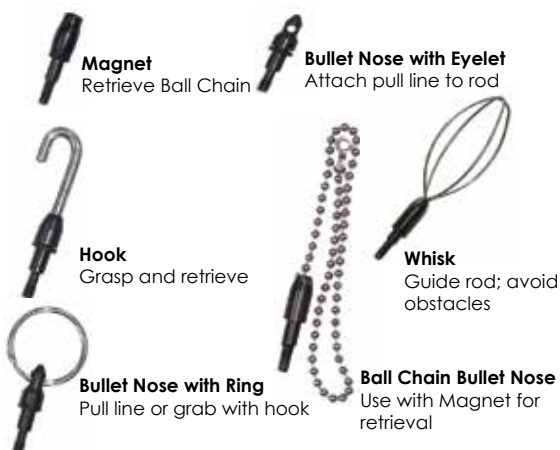

Part Number	Glow Rod Accessories
7-00A	Bullet Nose with Eyelet
7-01A	Hook
7-02A	Bullet Nose with Ring
7-03A	Whisk
7-04A	Ball Chain Bullet Nose
7-05A	Magnet
7-06AK	Accessory Kit



Accessory Kit
Hook
Magnet
Whisk
Ball Chain
Bullet Nose with Ring
Bullet Nose with Eyelet



Splicer Snips and Knives

Jameson remains the leading provider of splicer snips and knives to the telecommunications market due to a commitment to the highest standards of durability, performance, and quality.

We use a cryogenic (ice tempering) process commonly used in the manufacture of surgical instruments. This significantly improves wear resistance - indispensable when working with fiber optic strands and copper wire.



Splicer Snips

Precision ground for consistent quality, Jameson snips are ideal for telecommunication, electronic and electrical wiring jobs.

Snip Grip® Ergonomic Handle

Designed to increase cutting leverage while reducing hand and wrist fatigue.

Sold separately or with Jameson snips.



Splicer Skinning Knife

Straight style blade is molded into an easy-grip polymer handle that remains pliable in subzero temperatures. Blade is 20-25% thicker than comparable models.



Part Number	Scissors Without Snip Grip®
32-21PS	Scissors with Plain & Serrated Blade
32-21NS	Scissors with Notched & Serrated Blade
	Snip Grip®
32-40	Snip Grip® Handle
32-41PS	Plain, Serrated Scissors with Snip Grip®
32-41NS	Notched, Serrated Scissors with Snip Grip®
	Skinning Knife
32-24E	Skinning Knife - Ergonomic Handle
32-24J	Skinning Knife
32-25	Leather Knife Pouch; Slotted Belt Loop
32-24P	Skinning Knife with Slotted Loop Pouch

Part Number	Tool Pouches
32-11T	Tunnel Loop Leather Pouch for Scissors and Knife
32-11	Slotted Leather Pouch for Scissors and Knife
32-12	Slotted Leather Pouch for Scissors
32-25	Slotted Leather Pouch for Knife
32-16T	Black PVC Pouch for Scissors, Snip Grip® and Knife
32-30	Adjustable web belt for tool pouches
	Splicer Tools and Pouch Sets without Snip Grip®
32-24P	Slotted Pouch (32-25) with Knife
32-22NS	Slotted Pouch (32-11), Knife & Scissors (32-21NS)
32-23NS	Tunnel Pouch (32-11T), Knife & Scissors (32-21NS)
	Splicer Tools and Pouch Sets with Snip Grip®
32-42NS	Slotted Pouch (32-11), Knife, Snip Grip® & Scissors (32-21NS)
32-43NS	Tunnel Pouch (32-11T), Knife, Snip Grip® & Scissors (32-21NS)
32-16NS	PVC Pouch, Knife, Snip Grip® & Scissors (32-21NS)



Splicer Scissors and Knives

Splicer Tool Pouches

Our line of leather and PVC belt pouches keep splicing tools close at hand.

Leather pouches are reinforced with steel rivets for durability. Available with slotted openings or tunnel loop to slide on belt. Black PVC pouches will not split or tear with age and remain flexible, even in cold weather.



32-11T Tunnel Loop Leather Pouch with Snip Grip®, Scissors and Knife

32-11 Slotted Leather Pouch with Snip Grip®, Scissors, Knife



32-12 Slotted Leather Pouch with Scissors



32-30 Adjustable Belt for Tool Pouches



PVC Pouch with Snip Grip® and Scissors

PVC Pouch with Snip Grip®, Scissors and Knife

Scissors and Knife Sharpener

Compact sharpener works on scissors and knives. Features a finger stop for safety and easy grip handle.



32-50	Scissors and Knife Sharpener
-------	------------------------------

Fiber Optic Shears

Stainless steel alloy blades cut Kevlar® fibers, soft cable, wire insulation, tape, cable ties and other electronic materials. The serrated edge grips material, limiting slippage while cutting.

Ergonomic handles are made of a high strength fiberglass/ nylon blend.

Web belt pouch included.

Shears measure 5.5" with a 1.625" cutting length.



32-60	Fiber Optic Shears with Pouch
-------	-------------------------------

Wiring Tools



Hawkbill Skinning Knife

Designed to remove cable jackets in line work, Jameson's Hawkbill Skinning Knife is also a popular all-purpose knife.

Polished, high carbon steel blade is ice-tempered to maintain edge longer. The curved, double-edged blade easily cuts through cable jackets and insulation.

Features an ergonomic, cushioned handle with an expanded end to protect hand from slippage and a convenient built-in ring.

10" X 2"



Hawkbill Knives

Part Number	Description
32-70-C	Skinning Knife - Charcoal Handle
32-70-O	Skinning Knife - Orange Handle

Tri-Hole Fiber Optic Stripper

Jameson's fiber optic strippers features 3 openings to handle typical fiber stripping jobs:

- Strip 1.6-3 mm fiber jacket to 600-900 micron buffer coating
- Strip 900 micron buffer coating to 250 micron coating
- Strip 250 micron cable to glass fiber

Strips without scratching or nicking glass fiber.



Fiber Shear



Fiber Stripper

Part Number	Description
32-FS-375	Tri-Hole Fiber Optic Strippers
32-60-375	Kit: Fiber Stripper and Fiber Shear in Leather Tunnel Loop Pouch

Can Wrench with Two Socket Sizes

Used to open telephone pedestal boxes and tighten binding post screws, Jameson's insulated Can Wrench has a high-visibility nylon handle with hardened alloy steel sockets. Thin walled sockets for access to tight places.

- 7/16" and 3/8" Sockets
- 1.25" Deep Socket Fits Over Long Binding Posts

Can Wrench
Weight 0.31 lbs., Dimensions 7-1/2" x 5/8" x 5/8"

Can Wrench Kit
Weight 0.83 lbs., Dimensions 8-1/2" x 2-5/8" x 2"



Kit: Can Wrench, Snips, Knife



Can Wrench

Part Number	Description
32-216C	Can Wrench Only
32-16NS-216C	Kit: Can Wrench, Notched Serrated Snip with Snip Grip, Splicer Knife and Leather Tunnel Loop Pouch



Non-Conductive Fiberglass Conduit Rodders For Long Distance Cable Runs

Since 1980 Jameson's Buddy® System of rodders and fish tapes has evolved to become the most comprehensive in the industry.

Whether installing short run electrical wire or running long distance copper or fiber optic cable, Jameson has a Buddy® to handle the job for you.



The Jameson Fiberglass Advantage

- Fiberglass core is coated with high visibility polymer sheath to protect against rod abrasion and reduce friction.
- Round, flexible rod slides easily over wires in occupied conduit
- Exceptional bending strength for maneuvering tight turns
- Non-conductive and will not kink
- Accessories attach to fiberglass rod for greater versatility and easier fishing



	Rod Diameter	Rod Core	Lengths Available	Tensile/ Pull Strength*	Bend Radius	Recommended Conduit	Usage
Easy Buddy®	1/4"	.197"	300' - 400'	400-lb	4"	1" to 2"	Rodding conduit in buildings
Good Buddy®	3/8"	.250"	300' - 400'	1,000-lb	7"	2" to 4"	Confined areas; manhole to riser, riser to riser, cable vaults
Good Buddy® II	3/8"	.250"	400' - 600'	1,000-lb	7"	2" to 4"	Longer runs; manhole to riser, riser to riser, cable vaults
Good Buddy® III	3/8"	.250"	300' - 400'	1,000-lb	7"	2" to 4"	Maximum portability; manhole to riser, riser to riser, cable vaults
Big Buddy®	1/2"	.375"	400' - 1,000	1,400-lb	10"	4"+	Manhole to manhole or long run cable pulls

* Strength rating of rod/end ferrule interface. Actual fiberglass rod has higher ultimate tensile strength.

All Buddies® are shipped with End Ferrule and Pulling Eye

Custom rod lengths available for special applications



1/4"
OD ROD
.197" Core

Part Number	Easy Buddy®
6-14-300M	300' X 1/4" Easy Buddy
6-14-400M	400' x 1/4" Easy Buddy
6-14-500M	500' x 1/4" Easy Buddy

Rod is marked in 5' increments. Add 'MM' to part number for metric measure (1m increments).




Easy Buddy® Accessories



Accessory Kit
Attaches to Rodder Frame
For Easy Access

Part Number	Accessories	
6-14-AK	Accessory Kit	Splice Ferrule, Pulling Eye, End Ferrule, Adhesive, Emery Cloth, Canvas Pouch
6-139	Swivel Eye	Attach pull line or grip to freely rotating eye
6-140	Splice Repair Kit	Splice Ferrule, Adhesive, Emery Cloth, Instructions
6-141	Roller Guide	Guide rod through bends, sweeps, misalignments, wires
6-146	End Ferrule Repair	End Ferrule, Adhesive, Emery Cloth, Instructions
6-148	Rod Grapple Set	Connect two rodders from opposite directions
6-160	Pulling Eye	Attach to end fitting of rod for pull line attachment to rod
6-162	Flexible Leader	Guide rod through bends, sweeps, misalignments
6-14-BAG	Zippered Bag	Protect Easy Buddy from moisture and UV rays when not in use and during transport
6-14-COV	Cover	

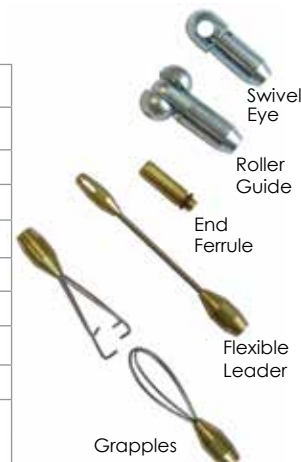



Rod Or Fish Conduit 2-4" In Diameter

Jameson offers a comprehensive Good Buddy® family to meet various applications for 3/8" rod:

Manhole-to-riser, riser-to-riser, cable vaults and large conduit runs.

- 7" Bending Radius
- 800-lb Tensile/Pull Strength
- Accessory Kit, End Ferrule and Pulling Eye Included



See Next Page For All
Good Buddy® Models



3/8"
OD ROD
.250" Core

Part Number	Good Buddy® Rodders
9-25-300M	300' X 3/8" Good Buddy
9-25-400M	400' X 3/8" Good Buddy
11A-25-400M	400' X 3/8" Good Buddy II
11A-25-500M	500' X 3/8" Good Buddy II
11A-25-600M	600' X 3/8" Good Buddy II
9A-25-300M	300' X 3/8" Good Buddy III
9A-25-400M	400' X 3/8" Good Buddy III

All Good Buddy® conduit rodder models come standard with rod marked in 5' increments. Add 'MM' to part number for metric measure (1m increments).



Good Buddy® Accessories

Part Number	Accessories	
9-25-AK	Accessory Kit	End Ferrule, Splice Ferrule, Adhesive, Emery Cloth, Canvas Pouch
9-139	Swivel Eye	Attach pull line or grip to freely rotating eye
9-141	Roller Guide	Guides rod through bends, sweeps, misalignments, wires
11-142	Shackle Fitting	Use with Swivel Eye for larger pulling loop to attach Pulling Eye. Must use 11-139 Swivel Eye.
9-143	Swivel Coupling	Connect two rods when single length is not long enough; provides rotation when pulling line, wire or rope.
9-148	Rod Grapples	Connects two rodgers from opposite directions
9-25-12ST	12" Stinger Tip	Guide rod through bends, sweeps, misalignments
9-25-24ST	24" Stinger Tip	
9-140	Splice Repair Kit	Splice Ferrule, Adhesive, Emery Cloth, Instructions
9-146	End Ferrule Repair	End Ferrule, Adhesive, Emery Cloth, Instructions
11A-AWK	AT Wheel Kit	Replacement All-Terrain Wheel Kit (2 wheels/axle)





Good
BUDDY®
Fiberglass Conduit Rodder

Detach or Fold Frame For Transport Into Confined Areas

- 300' and 400' lengths
 - Folds to 10" width for carrying into manholes
 - Reel detaches from frame for increased functionality in confined spaces.
 - Frame handle for easier transport and handling
 - Friction brake and safety roller feed
 - Operates vertically or horizontally
 - Accessory Kit Included
- 29"H x 29"L x 27"W (Folds to 10" Width)



Good
BUDDY® II
Fiberglass Conduit Rodder

Increased Rod Length For Longer Runs

- 400', 500' and 600' lengths
 - Oversized wheels to support weight of longer rod
 - Frame handle and wheels for transport
 - Friction brake and safety roller feed
 - Operates vertically or horizontally
 - Accessory Kit Included
- 39"H x 32"L x 18"W



Good
BUDDY® III
Fiberglass Conduit Rodder

Smaller Frame For Maximum Portability

- 300' and 400' lengths
 - Wheels and frame handle for transport
 - Slimmer frame than GB or GB II
 - Friction brake and safety roller feed
 - Operates vertically or horizontally
 - Accessory Kit Included
- 32"H x 28"L x 13"W



Rod Or Fish Conduit 4" Or Larger

Heavy duty non-conductive rodder is ideal for manhole-to-manhole work or long-run cable pulls.

With the ability to operate vertically or horizontally, the Big Buddy has the versatility to handle the toughest jobs.

Features a drag brake and safety feed eye to control pay out.

- 10" Bending Radius
- 800- lb Pull/Tensile Strength
- Includes End Ferrule and Pulling Eye
- Accessory Kit sold separately
- Dimensions: 47.5" x 44" x 20"



1/2"
OD ROD
.375" Core

Part Number	Big Buddy®
11-38-400M	400' X 1/2" Big Buddy
11-38-500M	500' X 1/2" Big Buddy
11-38-600M	600' X 1/2" Big Buddy
11-38-800M	800' X 1/2" Big Buddy
11-38-1000M	1,000' X 1/2" Big Buddy

Rod is marked in 5' increments. Add 'MM' to part number for metric measure (1m increments).

Big Buddy® Accessories




Repair Kit Attaches to Rodder Frame for Easy Access



Replacement All Terrain Wheel

Part Number	Accessories	
11-38-RK	Repair Kit	2 Splice Ferrules, End Ferrule, Emery Cloth, Adhesive, Canvas Pouch
11-139	Swivel Eye	Attaches pull line to rod
11-141	Roller Guide	Guides rod around bends, sweeps, misalignments, wires
11-142	Shackle Fitting	Use with swivel eye for larger pulling loop to attach pulling eye
11-143	Swivel Coupling	Connects two rods when single length is not long enough; provides rotation when pulling line or wire
11-148	Rod Grapple Set	Connects two rodgers from opposite directions
11-25-6ST	6' Stinger Tip	Guides rod through bends, sweeps and misalignments
11-25-8ST	8' Stinger Tip	Guides rod through bends, sweeps and misalignments
11-140	Splice Repair Kit	Splice Ferrule, Adhesive, Emery Cloth
11-146	End Ferrule Repair	End Ferrule, Adhesive, Emery Cloth
11-AWK	Wheel Kit	All-Terrain Wheel Kit (2 wheels/axle)

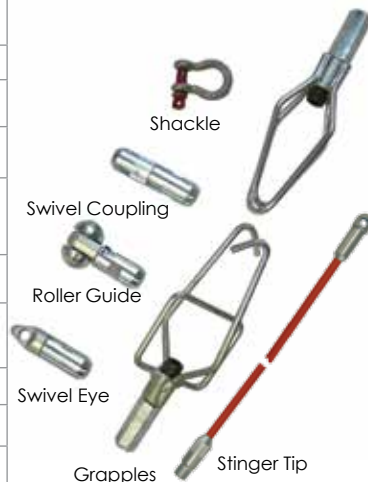





Trace Underground Pipe Without Digging

Connecting a signal transmitter to the Duct Hunter™ energizes the unit with a specific frequency. When the energized Duct Hunter™ rod is pushed into underground pipe, the signal radiates outward through the soil to the surface.

A signal receiver detects the frequency applied to the Duct Hunter™, allowing the entire buried utility pipe to be traced and marked continuously from above ground by one man without digging.

- Trace to depths up to 10'
- Locate sewer laterals to avoid cross bore
- Locate Ductile Iron, Plastic, Tile or Concrete Pipe
- Rod's ferrule attaches to sonde, roller guide or pulling eye
- Accessory kit included
- Bend Radius: 5/16" Rod has 6" Bend; 7/16" Rod has 9" Bend
- Rigid frame and wheel construction

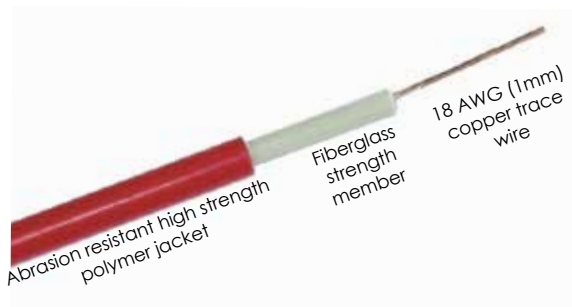


Attach alligator clip from standard field transmitter to Duct Hunter rod bolt. Attach the other transmitter clip to ground spike.

The copper wire inside rod is energized with an electromagnetic signal detectable above ground with a hand-held signal receiver.



Duct Hunter™ Traceable Rodders

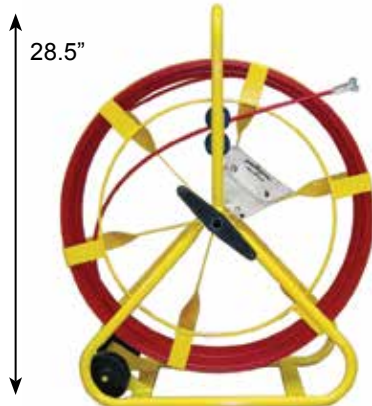

5/16" Rod
300'-400'
28.5" x 24" x 11"



5/16"
OD ROD



5/16" Rod
500'-800'
39" x 32" x 18"



7/16"
OD ROD



7/16" Rod
500'-1,000'
47.5" x 44" x 20"

Duct Hunter	Rod Diameter	Length	Recommended Conduit Size
12-516-300	5/16"	300'	2" - 4"
12-516-400	5/16"	400'	2" - 4"
12A-516-500	5/16"	500'	2" - 4"
12A-516-600	5/16"	600'	2" - 4"
12A-516-700	5/16"	700'	2" - 4"
12A-516-800	5/16"	800'	2" - 4"
13-716-500	7/16"	500'	4" or Larger
13-716-600	7/16"	600'	4" or Larger
13-716-800	7/16"	800'	4" or Larger
13-716-1000	7/16"	1000'	4" or Larger

Male end ferrule thread 3/8-16

Rod marked in 5' increments

Add 'M' to part number for U.S. measure or
'MM' for metric measure.

Duct Hunter™ Accessories




Accessory Kit



Fiberglass Stinger Tip



Flexible Leader



Roller Guide with Spring Adapter

7/16" Duct Hunter	5/16" Duct Hunter	Accessories	
13-716-AK	12-516-AK	Accessory Kit	Roller Guide, End Ferrule, Splice Ferrule, 2 Adhesive, 2 Emery Cloth, Canvas Pouch
9-141	9-141	Roller Guide	Guides rod through bends, sweeps, misalignments and wires; Increases contact with pipe on lead end of rod to improve overall signal strength
9-171	9-171	Roller Guide with Spring Adapter	Heavy duty spring permanently attached to swivel roller guide helps push rod past difficult bends or debris in pipe
12-162	12-162	Flexible Leader	Guides rod through bends, sweeps, misalignments
9-25-12ST	9-25-12ST	12' Fiberglass Stinger Tip	Guides rod through bends, sweeps and misalignments
9-25-24ST	9-25-24ST	24' Fiberglass Stinger Tip	
9-139	9-139	Swivel Eye	Attaches pull line to rod
13-146	12-146	End Ferrule Repair Kit	End Ferrule, Adhesive, Emery Cloth, Instructions
13-140	12-140	Splice Repair Kit	Splice Ferrule, Adhesive, Emery Cloth, Instructions



Trace Small Conduit or Pipes

Connecting a signal transmitter to the Duct Hunter™ energizes the unit with a specific frequency. When the energized Duct Hunter™ rod is pushed into pipe, the signal radiates outward to the surface.

A signal receiver detects the frequency applied to the Duct Hunter™, allowing the pipe to be traced inside walls, floors or underground.

The flexible rod makes it ideal for plumbing applications.

- Locate fiber optic cables in pvc pipe without tracer wire.
- Ideal for plumbing applications - fiberglass will not rust.
- Handle and lightweight frame for easy transport
- End ferrule has standard thread of 1/4-20
- Includes accessory kit
- 3/16" rod has 2.5" bend radius
- Dimensions: 22" X 17" X 7"



**3/16"
OD ROD**

Duct Hunter	Rod Diameter	Length	Recommended Conduit Size
15-316-100	3/16"	100'	1/2" - 4"
15-316-150	3/16"	150'	1/2" - 4"
15-316-200	3/16"	200'	1/2" - 4"
15-316-250	3/16"	250'	1/2" - 4"
15-316-300	3/16"	300'	1/2" - 4"
15-316-AK	Accessory Kit: Flexible Spring Leader Tip, End Ferrule, Splice Ferrule, Pulling Eye, Adhesive, Emery Cloth, Canvas Pouch		
Male end ferrule thread 1/4-20			



Accessory Kit Mounts on Canister's Frame For Easy Access



Live Tracers™ For Gas and Water Lines Save Time and Money Locating

Utilities and contractors using Jameson's Live Tracers™ report saving time and money by avoiding extensive digging that results in damage to roads and landscapes.

In Alabama, they discovered the pipe ran alongside the road 10' then went under the road and through a field. The Live Tracer™ saved hours of digging.

In South Carolina the pipe is typically 2' to 3' deep, but the Live Tracer went down 5'. Without it, the line would have been reported as unlocatable.

In Wyoming they were surprised at what a good signal they received in locating the service line to the main with 5" of snow on the ground.





Water Service Line Tracer Kit Locate Live Water Lines Meter To Main

Features fiberglass rod with tracer wire and Stuffing Box that does not leak water up to 125 PSI.

Use with transmitter and receiver to trace from above ground.

Trace service lines from the customer's meter to the main water line or to the home without interruption of service.

- Locate any plastic pipe without a tracer wire
- With an adapter, the stuffing box can be attached to the water pipe that was holding meter.
- Dimensions: 22" X 17" X 7"



3/16"
OD ROD



15-316-100-WL	3/16" X 100' Water Tracer Kit
15-316-150-WL	3/16" X 150' Water Tracer Kit
15-316-200-WL	3/16" X 200' Water Tracer Kit
15-316-250-WL	3/16" X 250' Water Tracer Kit
15-316-300-WL	3/16" X 300' Water Tracer Kit
Replacement Parts	
15-SB	Stuffing Box with Three Screws, Six O-Rings
15-146-GW	Bullet Tip Repair Kit
15-146-GW-T	Tapered Bullet Tip Repair Kit
15-170-GW	O-Ring, 12 Pack
15-WIPE	Lubricated Wipes




Live Tracer®

Gas Service Line Tracer Kit

Locate Live Plastic Lateral Gas Lines From Meter To Main

- Stuffing Box attaches to any riser with pipe reducer
- No blow-by while feeding rod into live line up to 125 PSI
- Small bullet tip guides rod from riser to lateral transition
- Use with transmitter & receiver to trace gas line from above ground
- Dimensions: 22" X 17" X 7"

Field evaluated by GTI

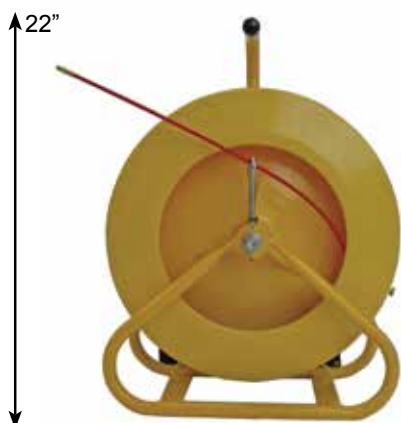

**NO
Blow By
125 PSI**



**3/16"
OD ROD**



Lateral Gas Line Tracer Kit: Fiberglass Rod and Reel with Integrated Stuffing Box and Grounding Equipment	
15-316-100-GL	3/16" X 100'
15-316-150-GL	3/16" X 150'
15-316-200-GL	3/16" X 200'
15-316-250-GL	3/16" X 250'
15-316-300-GL	3/16" X 300'
15-316-325-GL	3/16" X 325'
15-SB	Stuffing Box, Three Screws, Six O-Rings
15-146-GW	Bullet Tip Repair Kit
15-146-GW-T	Tapered Tip
15-170-GW	O-Ring, 12 Pack
15-WIPE	Lubricated Wipes





Locate Live Gas Mains With Electrofusion Vertical Insertion Tee

Traceable rodder features 1/4" fiberglass rod with tracer wire and stuffing box. Use with transmitter and receiver to trace main from above ground.

Includes accessory kit that mounts to rodder frame for easy access:

Stuffing Box, Grounding Cable With Clips, Screws, O-Rings, Rod Lubricant, Hex Key Driver, Adhesive, End Ferrule, Spring Leader, Canvas Storage Bag

- No Blow-By While Feeding Rod Into Live Main up to 125 PSI
- Trace Main From Above Ground
- Less Disruption To Roads And Landscapes
- Minimal Pavement Breakage, Excavation And Restoration



1/4"
OD ROD



Electrofusion Insertion Tapping Tee For 2" Gas Main

- Attach stuffing box to Electro-Fusion Insertion Tap Tee (*patent pending*)
 - Insert traceable rod into gas main with no blow by
- Use with transmitter and receiver to trace line from above ground.



Part Number	Description
16-14-600-GL	Live Tracer for Gas Main 1/4" X 600' Locating Rodder
16-2-TEE	2" IPS Electrofusion Insertion Tapping Tee with 1" IPS Port (4.7 mm resistor terminals)

Contact Our Customer Service Department For Additional Information About Accessories and Jameson's Certified Electrofusion Distributors



Receivers and Transmitter

Wand Signal Receiver

Part Number 17-100R

Compact, lightweight locator for easy one-hand operation. LCD display and function keys are conveniently located on wand and easy to operate.

Ideal for short runs, locates energized conductive paths such as iron, steel and copper water lines, gas lines, tracer wire by plastic pipe, copper, telephone/TV cables and Jameson's Duct Hunter™ Traceable Rodders.

- 2 active frequencies
- 2 operating modes: Line tracing (82 kHz) and sonde locating (512 Hz).
- Includes carrying case, manual, batteries.

Cable & Pipe Signal Receiver

Part Number 17-300R

Ergonomic design for one-hand operation and highly visible display. Features depth indication with push of a button and back-lit LCD display.

Locate any energized conductive path - iron, steel and copper water lines, gas lines, tracer wire by plastic pipe, telephone/TV cables, copper and aluminum wire, conduit, power lines and Duct Hunter™ Traceable Rodders.

- 4 active frequencies: 512 Hz, 8 kHz, 33kHz, 82 kHz.
- 2 passive frequencies: 60 Hz power and RF
- Operating Modes: Peak, null and sonde
- Includes case, manual, conductive clips, batteries.

Transmitter

Part Number 17-500T

Digital transmitter energizes conductive paths and supports Jameson's receivers. Includes low frequencies for direct connect long runs, higher frequencies for tracing Duct Hunter™ rod in plastic pipes or inductive modes.

Lightweight unit features easy-to-read high contrast LCD screen.

Includes carrying case, manual, batteries, ground spike and wire leads.

Active frequencies: 512 Hz, 8 KHz, 33KHz and 82 KHz. 1 Watt Max.

Part	Locators and Transmitter
17-100R	Wand Signal Receiver
17-100RTK	Wand Signal Receiver with Transmitter
17-300R	Cable and Pipe Receiver
17-300RTK	Cable and Pipe Receiver with Transmitter
17-500T	Transmitter

Sonde and Adapters



Sonde #14-169



Little Buddy™ 3/16" Rod



Solid Adapter 10-170



Mini Duct Hunter™ 3/16" Rod
3/16" Rod Fits Sonde without Adapter



Easy Buddy™ 1/4" Rod



Solid Adapter 6-170



Good Buddy™ 3/8" Rod



Double Female 12-170



Solid Adapter 9-170



Big Buddy™ 1/2" Rod




Heavy Duty Flexible Adapter with Chain 9-169



Duct Hunter™ 5/16" Rod



Duct Hunter™ 7/16" Rod



9-171 Flexible Adapter with Roller Guide

Guides rod through bends in pipe and helps prevent breaking end of rod when inserting into pipe. Fits 3/8", 1/2", 5/16", 7/16"



12-165 Kit: Adapter 9-169 & Sonde 14-169

Locate Underground Pipe

Use with Jameson's Buddy® Rodders and Fish Tapes or Duct Hunter™ Traceable Rodders to Locate in Underground Pipes or Conduit. Adapters attach rod to sonde.

Part Number	Adapters
10-170	Solid Adapter, Fits 3/16" Little Buddy
6-170	Solid Adapter, Fits 1/4" Easy Buddy Rod
12-170	Solid Double Female Adapter, Fits 3/8", 1/2", 5/16", 7/16" Rod and M-10 Male Sonde
9-170	Solid Adapter, Fits 3/8", 1/2", 5/16", 7/16" Rod
9-171	Flexible Adapter with Roller Guide, Fits 3/8", 1/2", 5/16", 7/16" Rod
9-169-M10	Heavy Duty Flexible Adapter with Chain, 3/8-16, Fits Sondes with M10 Stud and Jameson's 3/8", 5/16", 7/16" and 1/2" Buddy Rodders
9-169	Heavy Duty Flexible Adapter with Chain, Fits 3/8" and 1/2" Buddy Rodders; 5/16" and 7/16" Duct Hunters
12-165	Kit: Sonde 14-169 and Adapter 9-169
14-169	Sonde, Operates at 512 HZ, 1/4-20 Female Thread, .12 lbs, 2.25" X .75"

Couplers and Poles

The Safe, Efficient Way To Test Or Couple To Out-Of-Reach Cables

Fiberglass foam filled pole with Clamp Adapter permanently mounted to one end and a male ferrule at the other end to connect additional poles if needed.

Foam core prevents moisture build-up inside the pole.

Use pole with clamp and transmitter to energize wires in a man-hole without entering it.

Removable IHA-2 Adapter snaps into female ferrule of Jameson extension and base poles for use with clamp.



Part Number	Poles
FG-4MC	4' Head Pole
FG-6MC	6' Head Pole
FG-8MC	8' Head Pole
FG-10MC	10' Head Pole
17-4HC	4" Clamp
IHA-2	Removable Head Clamp Adapter



The Leader In Fiberglass Poles Since 1956

Jameson introduced the first fiberglass lay-up sticks in 1956 to meet the needs of telecommunication linemen. The strength and durability of fiberglass proved indispensable when lifting leak detection equipment overhead and soon replaced wooden poles as the industry standard.

Today, Jameson's pole line includes a variety of configurations, tools and accessories to serve telecommunication and CATV linemen, professional arborists and landscapers. By consistently providing the highest quality fiberglass poles, Jameson remains the professional's choice for line clearance and tree care.






All Jameson Poles Are Manufactured With A Polymer Protective Surface Veil To Prevent Fiber Blooming At Surface Due To Abrasion Or Ultra-Violet Light



Aircraft Grade Aluminum Ferrules With Exterior Leaf Spring Locking Button Provide A Secure Connection When Attaching Multiple Poles Or Tool Heads

Choosing A Pole

- Select Pole Model Based On Typical Use - See Chart Below
- Select Configuration Based On Application (We Recommend Starting With A Base Pole) - Next Page
- Select Tool Head (Pruner, Pole Saw Or Accessory) With Adapter
- Attach Tool Head To Pole's Female Ferrule With Adapter
- For Additional Length, Attach Extension Pole(s) Into Base Pole

Pole Models					
					
Typical Use	Line Clearance Aerial Construction	Professional Tree Care and/or Aerial Construction	Professional Tree Care The Ergonomic Choice for Prolonged Usage	Landscapers And Homeowners	Landscapers And Homeowners
Key Features	Foam Core Protects Against Moisture And Debris	Highest Strength. Industry Standard For Over 50 Years. Most Versatile.	Highly Durable Enamel Coating Lightest Weight	Light Duty Landscaping	Telescopes Saves Space
Dielectric Testing	Individually Tested To 100Kv Per Foot For 5 Minutes	Batch Tested To 100 Kv Per Foot For 5 Minutes	Batch Tested To 100 Kv Per Foot For 5 Minutes	No	No
Wall Thickness	Standard	Standard	Lowest	Low	Standard
Color	High Visibility Safety Yellow	Jameson Yellow	High Gloss Blue	Green	Jameson Yellow
Jameson Pole Models Can Be Used Together In A Variety Of Combinations - All Have Same Ferrules					

Poles and Lay Up Sticks Overview



Pole Configurations

Base Pole with Rubber End Cap and Female Ferrule



Extension Pole with Male Ferrule and Female Ferrule



Saw Head Pole with Male Ferrule and Permanently Mounted Saw Head for Attaching Saw Blade



Telescoping Pole with Female Ferrule



For Highest Performance And Safety, Jameson Recommends Using A Base Pole When Using One Pole Or Starting With Base Pole When Working With Multiple Poles.

Unique Adapter and Pole Ferrule System

Makes it easy to change from a pruner head to pole saw head or pole lengths of 6' to 12'. The exterior leaf spring locking button on the ferrule offers a strong connection, whether attaching poles or tool heads.

This versatility saves time and money in the field.




Pruners

With Adapters Snap Into Pole's Female Ferrule



Pole Saw Head

With Adapter Snaps Into Pole's Female Ferrule

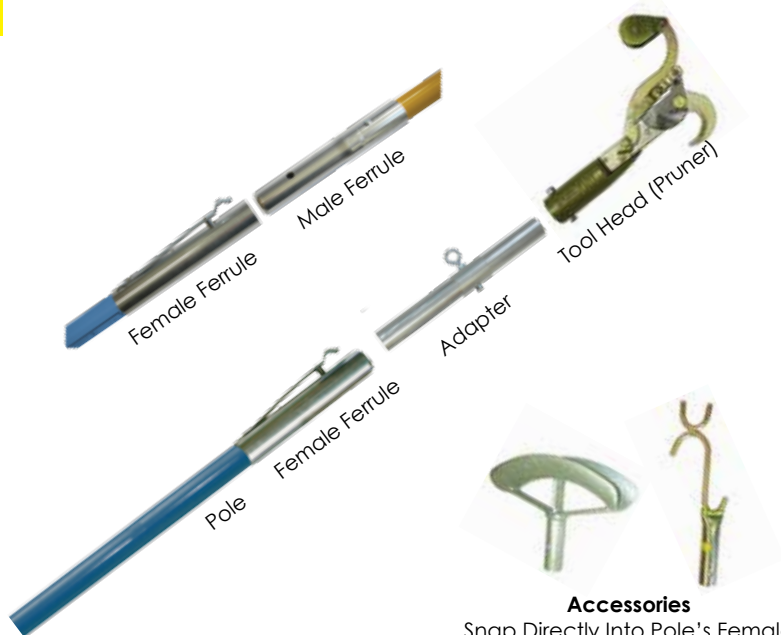

Accessories

Snap Directly Into Pole's Female Ferrule No Adapter Needed

Pole Saw Options



Sawhead Poles - Use Only As Pole Saw

Sawhead is permanently mounted on pole. Saw blade (sold separately) is attaches to sawhead.

Jameson recommends using Sawhead Poles with Base Poles.



Option: Buy Sawhead with Pole Adapter (See Pole Saws). Snap Into Base Pole or Extension Pole's Ferrule.

Pole and Accessory Compatibility

Model	Configuration	Base Pole	Extension Pole	Saw Head Pole	JA Pruners	PH Pruners	Saw Head With Adapter	Cable Lifter Accessory	Wire & Limb Raiser
JE, BL, FG, LS	Base		●	●	●	●	●	●	●
JE, BL, FG, LS	Extension	●	●	●	●	●	●	●	●
JE, BL, FG, LS	Saw Head	●	●	●	Only Saw Blade Can Be Mounted On Permanent Mount Saw Head Pole				
Telescoping	With Ferrule	We Do Not Recommend Attaching Additional Poles To Telescoping Pole			●	●	●	●	●



JE and FG Fiberglass Poles

Preferred For Aerial Construction And Line Clearance

Jameson's original foam core pole is the highest quality fiberglass pole available.

Foam core prevents debris and moisture build up inside pole and adds extra hoop strength and rigidity.

High visibility color.

Meets requirements of OSHA Subpart V 1926.951(d)(1)(i):
Every JE series pole is tested to 100KV per foot for 5 minutes.
 Not a "hot stick."

JE Series

Safe-stik
 FIBERGLASS
 SINCE 1954



.110" Wall Thickness
 1.25" Pole Diameter
 2.6 Lbs
 Based On 6' Extension Pole



Pole	6'	8'	10'	12'
Base	JE-6F	JE-8F	JE-10F	JE-12F
Extension	JE-6	JE-8	JE-10	JE-12
Sawhead	JE-6SFP	JE-8SFP	JE-10SFP	JE-12SFP

Original Hollow Core Favorite Of Professional Arborists

Jameson's strongest and most popular pole is lighter than the JE series, offering greater control and exceptional bending strength.

Batch tested to 100KV per foot for five minutes.

Not a "hot stick."

FG Series



.125" Wall Thickness
 1.25" Pole Diameter
 2.4 Lbs
 Based On 6' Extension Pole



Pole	6'	8'	10'	12'
Base	FG-6F	FG-8F	FG-10F	FG-12F
Extension	FG-6	FG-8	FG-10	FG-12
Sawhead	FG-6SFP	FG-8SFP	FG-10SFP	FG-12SFP

For highest performance and safety, Jameson recommends a Base Pole when using one pole or starting with a Base Pole when working with multiple poles.
 Refer to "Pole Overview" for help determining what model and configuration you need.

Lightweight Pole For Tree Trimming



Jameson's thinnest walled pole is lightweight and easy to control, making it ideal for tree trimming.

Its lighter weight results in less fatigue during extended work periods and easier handling.

Durable, high gloss enamel coating for long life, easy cleaning, and prevention of fiber bloom.

Batch tested to 100KV per foot for five minutes.

Not a "hot stick."



.075" Wall Thickness
1.25" Pole Diameter
1.6 Lbs
Based On 6' Extension Pole



Pole	6'	8'	10'	12'
Base	BL-6F	BL-8F	BL-10F	BL-12F
Extension	BL-6	BL-8	BL-10	BL-12
Sawhead	BL-6SFP	BL-8SFP	BL-10SFP	BL-12SFP

The Light Duty Pole For Landscapers



Economical pole for landscapers and homeowners.
Lightweight, flexible.



.10" Wall Thickness
1.25" Pole Diameter
1.9 Lbs
Based On 6' Extension Pole



Pole	6'	8'	10'	12'
Base	LS-6F	LS-8F	LS-10F	LS-12F
Extension	LS-6	LS-8	LS-10	LS-12
Sawhead	LS-6SFP	LS-8SFP	LS-10SFP	LS-12SFP

For highest performance and safety, Jameson recommends a Base Pole when using one pole or starting with a Base Pole when working with multiple poles.
Refer to "Pole Overview" for help determining what model and configuration you need.



Double Lock™ Telescoping Poles

Saves Space - Adjusts To Fit The Job

The leader in fiberglass poles brings you a high quality, lightweight telescoping pole that saves space and adjusts to fit your job.

Double locks (internal lock and external cap) ensure poles will not collapse, offering a secure connection at any length for maximum versatility and safety.

Lightweight, durable fiberglass will not crimp under high stress like aluminum poles.


Double Lock™ System

Extend pole sections to desired length, twist top pole to engage internal lock then tighten outer cap lock to secure.



Telescoping Pole With Femal Ferrule

Ferrule allows the use of Pruner or Pole Saw with the same pole

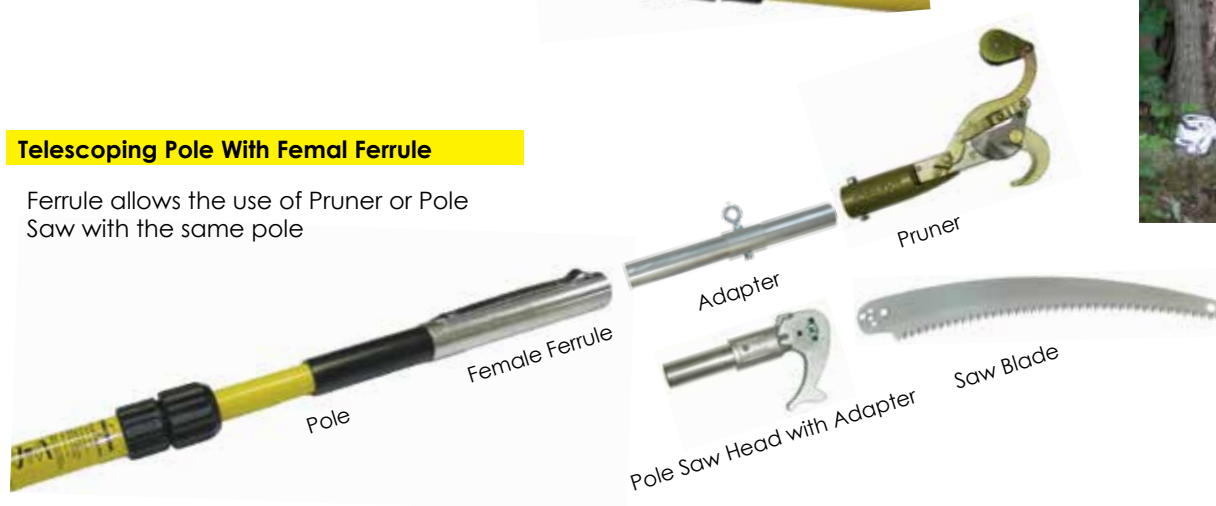

Part Number	Double-Lock™ Telescoping Poles
TP-12-14	6-12' Telescoping Pole with JA-14S Pruner & Rope
TP-14-14	7-14' Telescoping Pole with JA-14S Pruner & Rope
TP-12-S	6-12' Telescoping Pole with SB-TE13 Tri-Cut Saw Blade
TP-14-S	7-14' Telescoping Pole with SB-TE13 Tri-Cut Saw Blade
TP-12-11	6-12' Telescoping Pole with PH-11 Pruner, SB-1T Saw Blade, Rope
TP-14-11	7-14' Telescoping Pole with PH-11 Pruner, SB-1T Saw Blade, Rope
TP-12F	6-12' Telescoping Pole with Female Ferrule
TP-14F	7-14' Telescoping Pole with Female Ferrule
TP-12PKG1	TP-12F Telescoping Pole, JA-14 Pruner, Adapter, Rope, PS-3FP Pole Saw Head and 13" Tri-Cut Blade
TP-12	6-12' Telescoping Pole with Adapter
TP-14	7-14' Telescoping Pole with Adapter

TP-12-S and TP-14-S
Sawhead Permanently
Mounted on Telescoping Pole



TP-12-14
TP-14-14
JA-14S Pruner Permanently
Mounted on Telescoping Pole

TP-12-11
TP-14-11
PH-11 Pruner Permanently
Mounted on Telescoping Pole

For safety, Jameson does not recommend attaching additional poles or Big Shot to Telescoping Poles.




Heavy Duty Side-Cut Pruners For Professional Arborists

The original JA-14 has a 1.25" cutting capacity.

The Big Mouth Pruner has a larger 1.75" hook opening. It also features a removable upper spring pin and blade bolt for easy blade replacement and sharpening.

- Forged steel components for added strength
- Enhanced spring for smoother cutting action
- Raised hook edge reduces blade drag

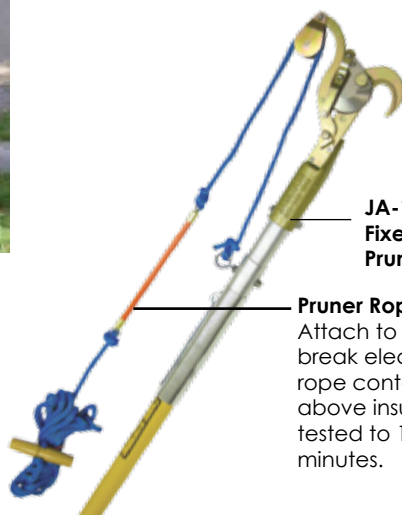

**JA-14
Fixed Pulley
Pruner**

Pruner Rope Insulator

Attach to pruner rope to break electrical current if rope contacts energized lines above insulator. Fiberglass tested to 100KV per foot for 5 minutes.



**JA-14 DP
Double Pulley Pruner**
(Adapter Included)

Double pulley for additional leverage and significant reduction in required pulling force.

Shown with Rope



**JA-14 S
Swivel Pulley Pruner**

Swivel provides versatility in pull direction and more leverage with less pressure on pulley arm.


Shown with Rope and Adapter



**JA-34
Big Mouth 1.75" Cut Pruner**
Shown with Rope and Adapter



1.75" Cut Pruner
Largest Cutting Capacity Pruner

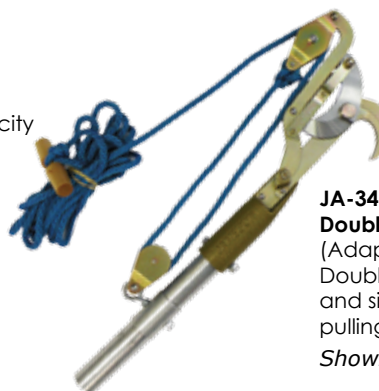

**JA-34 DP
Double Pulley Big Mouth Pruner**
(Adapter Included)

Double pulley for additional leverage and significant reduction in required pulling force.

Shown with Rope

Part Number	Pruners
JA-14	Standard Fixed Pulley Pruner
JA-14S	Swivel Pulley Pruner
JA-14DP	Double Pulley Pruner
JA-34	Big Mouth Pruner
JA-34DP	Double Pulley Big Mouth Pruner - Includes Adapter
PHA-14	Adapts JA-14, JA-14S or JA-34 Pruner To Pole
PHA-34DP	Replacement Adapter for JA-34DP Pruner (Note: This pruner is sold with adapter)

Part Number	Pruner Accessories
PR-20	Pruner Rope, 5/16" X 20' with Handle
PRI-7.5	Pruner Rope Insulator, 7"
PRI-12	Pruner Rope Insulator, 12"

Part Number	Pruner Packages
P-14-A	JA-14 Pruner and Adapter
P-14-AS	JA-14S Pruner and Adapter
P-34-A	JA-34 Pruner with Adapter
PH-14-PKG	JA-14 Pruner, Adapter and Rope
PH-14S-PKG	JA-14S Pruner, Adapter and Rope
JA-14DP-PKG	JA-14DP Pruner, Adapter and Rope
PH-34-PKG	JA-34 Pruner, Adapter and Rope
JA-34DP-PKG	JA-34DP Pruner, Adapter and Rope

Not For use On Or Near Live Wires



The Standard With Telecommunications

Jameson's steel PH pruners have become the standard in telecommunications and CATV for trimming around aerial lines or drops.

Both models feature a chain pulley and center cut blade.



**PH-11 Pruner with 1" Center Cut
"Bell B Pruner"**
Uses SB-1T or SB-2 Saw Blade
Shown with Rope and Adapter



**PH-12 Pruner with 1.5" Center Cut
Does Not Accommodate Saw Blade
"Bell C Pruner"**
Shown with Rope and Adapter



PH-11 Pruner with Adapter,
SB-2 Teflon Coated Saw
Blade Rope

Pruner Rope Insulator

Attach to pruner rope to break electrical current if rope contacts energized lines above insulator. Fiberglass tested to 100KV per foot for 5 minutes.



Part Number	Pruner Packages
P-11-A	PH-11 Pruner with PHA-11 Adapter
P-12-A	PH-12 Pruner with PHA-12 Adapter
PH-11-PKG	PH-11 Pruner, Adapter, SB-1T Saw Blade, Rope, Canvas Scabbard
PH-12-PKG	PH-12 Pruner, Adapter and Rope

Part Number	Pruner Accessories
PR-20	Pruner Rope, 5/16" X 20' with Wooden Handle
PRI-7.5	Pruner Rope Insulator, 7"
PRI-12	Pruner Rope Insulator, 12"

Part Number	Pruners
PH-11	1" Center Cut Pruner
PH-12	1.5" Center Cut Pruner
Adapters	
PHA-11	Adapts PH-11 Pruner to Pole (Aluminum)
PHA-12	Adapts PH-12 Pruner to Pole (Aluminum)
WPA-11	Wooden Adapter - Adapts PH-11 Pruner, #20 Gilmore Pole Saw, Fanno #5

Not For use On Or Near Live Wires



Corrosion Resistant, Lightweight Aluminum Pole Saw Heads

Low profile design maneuvers easily in dense foliage. Convenient hook pulls loose limbs and branches free.



PS-3FP Pole Saw Head

Center Blade Mount; Mounting Pin

Mounting Pin allows easy blade replacement without tools. Includes pole adapter.

Fits Saw Blades: SB-1C, SB-13TE, SB-16TE, SB-16TE-W and SB-13TE-H



PS-3 Pole Saw Head Casting

Offset Blade Mount; Carriage Bolt

Includes pole adapter.

Fits Saw Blades: SB-2 and SB-4



PS-3FPS1

Pole Saw Head with 13" Tri-Cut Blade

PS-3FPK

Pole Saw Head, 13" Tri- Cut Blade, and Leather Scabbard

PS-3SB

Pole Saw Head and SB-2 Blade

SBC-2

Canvas Cover

Using SB-UC and UA-1 Adapters, saw blade unit snaps directly onto pole's ferrule.

SB-UC Saw Blade Adapter

Adapt SB-2 or Tri-Cut Blades to any manufacturer's universal head hot stick or Jameson's UA-1 Adapter.

UA-1 Universal Tool Adapter

Adapts any manufacturer's universal head tools to Jameson poles.

Part Number	Pole Saw Heads
PS-3	Pole Saw Head - Offset Blade Mount, Carriage Bolt & Adapter
PS-3FP	Pole Saw Head - Center Blade Mount, Mounting Pin & Adapter
Pole Saw Kits (Head with Saw Blade)	
PS-3K	PS-3 Pole Saw Head, SB-2 Saw Blade and Leather Scabbard
PS-3SB	PS-3 Pole Saw Head, SB-2 Saw Blade
PS-3FPS1	PS-3FP Pole Saw Head and SB-13TE Saw Blade
PS-3FPS2	PS-3FP Pole Saw Head and SB-16TE Saw Blade
PS-3FPK	PS-3FP Pole Saw Head, SB-13TE Saw Blade and Leather Scabbard
SB-UC	Saw Blade Adapter
UA-1	Universal Tool Adapter
SBL-2	Leather Scabbard
SBC-2	Canvas Cover

Not For use On Or Near Live Wires



Tri-Cut and Single Edge Saw Blades

Jameson's line of conventional 16" saw blades have long been an industry standard with CATV and telecommunication companies for line clearance.

Expanding our product line to meet the demands of professional arborists, Jameson introduced Barracuda™ Tri-Cut Saw Blades.

Hard-chrome plated with impulse hardened teeth, tri-cut blades provide a quicker, cleaner cut with less wear on the blade than traditional blades.



SB-13TE
13" Tri-Cut Saw Blade



SB-13TE-GUL
13" Tri-Cut Blade with Gullets
Gullets allow chips and debris to exit cut.



SB-13TE-H
13" Tri-Cut Blade with Hook
Prevents slipping off or pulling out of cut; pulls small branches or vines.



SB-16TE
16" Tri-Cut Saw Blade



SB-16TE-GUL
16" Tri-Cut Blade with Gullets



SB-16TE-W
16" Mammoth Tri-Cut Saw Blade
Wider, thicker blade is more rigid than typical 16" blades.



SB-1C
16" Chrome Blade
Fits PS-3FP Pole Saw Heads



SB-1T
16" Teflon Coated Blade
Fits PH-11 Pruner



SB-2
16" Teflon Coated Blade
Fits PS-3 Pole Saw Head and PH-11 Pruner



SB-5U
SB-2 Blade with SB-UC
Universal Adapter

Tri-Cut Blades Fit PS-3FP Saw Head, SB-UC Universal Saw Blade Casting and Hand Saw Handles

Part Number	Barracuda Tri-Cut Saw Blades
SB-13TE	13" Tri-Cut Saw Blade
SB-13TE-GUL	13" Tri-Cut Saw Blade with Gullet Edge
SB-13TE-H	13" Tri-Cut Saw Blade with Hook
SB-16TE	16" Tri-Cut Saw Blade
SB-16TE-GUL	16" Tri-Cut Saw Blade with Gullet Edge
SB-16TE-W	16" Mammoth Tri-Cut Saw Blade <i>Does not fit hand saw</i>
SB-13TEU	13" Tri-Cut Saw Blade with SB-UC Adapter
SB-16TEU	16" Tri-Cut Saw Blade with SB-UC Adapter

Part Number	16" Conventional Saw Blades
SB-1C	16" Chrome Saw Blade, Fits PS-3FP Saw Head
SB-1T	16" Teflon Coated Saw Blade, Fits PH-11 Pruner
SB-2	16" Teflon Coated Saw Blade, Fits PS-3 & PH-11 Pruner
SB-5U	SB-2 Saw Blade with SB-UC Adapter

Hand Pruning Saws



Tri-Cut Saws Offer A Clean Cut

Featuring Jameson's Barracuda™ impulse hardened tri-cut teeth, our hand saws provide an efficient and clean cut. Blades are replaceable on soft grip and wood handle hand saws.

13" And 16" Tri-Cut Hand Saws - Soft Grip Handle

Ergonomic soft grip handle features index finger stop for safety and opening for lanyard line.
Handle available in Orange or Green



Shown with 13" Blade



Shown with 13" Hook Blade



13" And 16" Tri-Cut Hand Saws - Wood Handle



Rubber Belting Scabbard



Leather Scabbard

8" Tri-Cut Folding Saw

Blade folds into metal handle with rubber grip. Thumb lock automatically engages when closed or extended. All rubber and metal design for superior durability. Lanyard line opening in handle. Available with nylon sheath that fastens to belt or carabiner.



Part Number	Folding Hand Saw
SB-8TE-F	8" Folding Saw
SB-8TE-FS	Nylon Sheath for 8" Folding Saw
SB-8TE-FPKG	8" Folding Saw with Nylon Sheath

Part Number	Hand Saws
HS-13TE	13" Hand Saw <i>Specify Handle Color</i>
HS-16TE	16" Hand Saw <i>Specify Handle Color</i>
HS-13TE-S	13" Hand Saw with Leather Scabbard <i>Specify Handle Color</i>
HS-13TE-GUL	13" Hand Saw with Gullet Edge Blade <i>Specify Handle Color</i>
HS-16TE-GUL	16" Hand Saw with Gullet Edge Saw Blade <i>Specify Handle Color</i>
HS-13TE-H	13" Hand Saw with Hook <i>Specify Handle Color</i>
HS-16TE-H	16" Hand Saw with Hook <i>Specify Handle Color</i>
HS-H	Hand Saw Handle <i>Specify Handle Color</i>
HS-16TE-S	16" Hand Saw with Leather Scabbard <i>Specify Handle Color</i>
HS-13SL	13" Leather Scabbard for Hand Saw
HS-16SL	16" Leather Scabbard for Hand Saw
HS-13SB	13" Rubber Belting Scabbard for Hand Saw
HS-16SB	16" Rubber Belting Scabbard for Hand Saw



Complete Tree Trimming Packages

Popular Combinations in One Kit

Pre-packaged kits contain everything needed for trimming trees: Poles, Pruner, Pole Saw and/or Hand Saw. A variety of combinations makes it easy to find the best fit for your needs.

JE Series Kits With Pole Adapters

Pole Adapters Allow User To Replace Pruner Head Or Pole Saw Quickly And Easily Without Tools, Using The Same Pole

JE-14K	JA-14 Pruner with Pole Adapter & Pruner Rope Two 6' JE Extension Poles, One 6' JE Base Pole
JE-11K	PH-11 Pruner with Pole Adapter & Pruner Rope SB-1T Saw Blade, Canvas Scabbard Two 6' JE Extension Poles, One 6' JE Base Pole
JE-6PKG-2	JA-14 Pruner, Pole Adapter, Rope, Saw Head, 13" Tri-Cut Saw Blade, Wire & Limb Raiser, 13" Tri-Cut Hand Saw 6' JE Extension Pole, 6' JE Base Pole
JE-6PKG-7	JA-34DP Big Mouth Double Pulley Pruner With Adapter, Pruner Rope Saw Head, 16" Tri-Cut Saw Blade 6' JE Extension Pole, 6' JE Base Pole
JE-6PKG-8	JA-34DP Big Mouth Double Pulley Pruner With Adapter And Pruner Rope PS-3FP Saw Head, 16" Tri-Cut Saw Blade Hand Saw with Orange Handle, Limb Raiser, Two 6' JE Extension Pole, One 6' JE Base Pole

FG Series Kits With Pole Adapters

Pole Adapters Allow User To Replace Pruner Head Or Pole Saw Quickly And Easily Without Tools, Using The Same Pole

FG-6PKG-1	JA-14 Pruner with Adapter & Pruner Rope 13" Tri-Cut Saw Blade, Saw Head 6' FG Extension Pole, 6' FG Base Pole
FG-6PKG-2	JA-14 Pruner with Adapter & Pruner Rope 13" Tri-Cut Saw Blade, Pole Saw Head Wire Raiser, 13" Tri-Cut Hand Saw 6' FG Extension Pole, 6' FG Base Pole
FG-6PKG-3	JA-14DP Pruner with Adapter & Pruner Rope 6' FG Extension Pole, 6' FG Base Pole
FG-6PKG-7	JA-34DP Big Mouth Double Pulley Pruner, Adapter And Pruner Rope PS-3FP Pole Saw Head, 16" Tri-Cut Saw Blade 6' FG Extension Pole, 6' FG Base Pole
FG-11K	PH-11 Pruner with Adapter & Rope SB-1T Saw Blade, Canvas Scabbard Two 6' FG Extension Poles, One 6' FG Base Pole
FG-12K	PH-12 Pruner with Adapter & Pruner Rope Two 6' FG Extension Poles, One 6' FG Base Pole
FG-14K	JA-14 Pruner with Adapter & Pruner Rope Two 6' FG Extension Poles, One 6' FG Base Pole

LS Series Kits - Permanent Mount

No Pole Adapters - Permanently Mounted Tool Heads

LS-6PKG-1	JA-14 Pruner Permanently Mounted on 6' LS Pole with Male Ferrule on Bottom 6' LS Base Pole Pruner Rope
LS-6PKG-4	JA-14 Pruner Permanently Mounted on 6' LS Pole with Male Ferrule on Bottom 6' LS Base Pole and 6' LS Extension Pole Pruner Rope
LS-6PKG-2	JA-14 Pruner Permanently Mounted on 6' LS Pole with Male Ferrule on Bottom 6' LS Base Pole & 6' LS Sawhead Pole with PS-3FP Head Pruner Rope

LS Series Kits With Pole Adapters

Pole Adapters Allow User To Replace Pruner Head Or Pole Saw Quickly And Easily Without Tools, Using The Same Pole

LS-8PKG-1	JA-14 Pruner, Adapter & Rope PS-3FP Pole Saw Head, 13" Tri-Cut Blade (SB-13TE) 8' LS Base Pole
LS-6PKG-3	JA-14 Pruner, Adapter & Rope PS-3FP Pole Saw Head 6' LS Base Pole and 6' LS Extension Pole
LS-6PKG-6	16" Tri-Cut Saw Blade (SB-16TE) 6' LS Sawhead Pole with PS-3FP Head 6' LS Base Pole and 6' LS Extension Pole
LS-6PKG-5	JA-14DP Pruner, Adapter & Rope PS-3FP Pole Saw Head, 13" Tri-Cut Blade (SB-13TE) 6' LS Base Pole and 6' LS Extension Pole
LS-6PKG-7	PH-11 Pruner, Adapter & Rope One 6' LS Base Pole and Two 6' LS Extension Poles
LS-6PKG-8	PH-12 Pruner, Adapter & Rope One 6' LS Base Pole and Two 6' LS Extension Poles

BL Series Kits With Pole Adapters

Pole Adapters Allow User To Replace Pruner Head Or Pole Saw Quickly And Easily Without Tools, Using The Same Pole

BL-8PKG-1	JA-14 Pruner, Adapter & Rope PS-3FP Pole Saw Head, 16" Tri-Cut Blade (SB-16TE) One 8' B-Lite Base Pole and Two 8' B-Lite Extension Poles
BL-8PKG-5	JA-34DP Big Mouth Double Pulley Pruner Pole Adapter & Rope PS-3FP Pole Saw Head One 8' B-Lite Base Pole and Two 8' B-Lite Extension Poles
BL-6PKG-1	JA-14 Pruner, Adapter & Rope PS-3FP Pole Saw Head, 16" Tri-Cut Blade (SB-16TE) One 6' B-Lite Base Pole and Two 6' B-Lite Extension Poles
BL-6PKG-5	JA-34DP Big Mouth Double Pulley Pruner Pole Adapter & Rope PS-3FP Pole Saw Head One 6' B-Lite Base Pole and Two 6' B-Lite Extension Poles

Pole Accessories



Pole Storage Bag



Heavy duty vinyl bag conveniently carries poles and protects them during transport or storage. Features four 6' pole pockets, outside pruner head pocket and carrying straps.

Limb And Wire Raiser

Plated steel wire raiser is designed for placing cable on rollers, construction blocks and hardware during line construction. Conveniently pulls or lifts branches out of dense foliage. No adapter needed.

Not for use on or near live wires.



Cable Lifter

Aluminum alloy Cable Lifter lifts copper, fiber optic and coaxial cable. Use it to place cable on rollers, construction blocks and hardware during line construction. No adapter needed.

Not for use on or near live wires.



Pike Pole Spear

Allows you to convert the FG or JE Pole into a tool for plumbing up and testing utility poles. Snaps directly into pole's ferrule.



Saw Blade Adapter

Allows direct mounting of saw blade to pole without saw head. Use SB-UC and UA-1 Adapters together to snap into pole's ferrule.



SB-UC Saw Blade Adapter

Adapt SB-2 or Tri-Cut Blades to any manufacturer's universal head hot stick or Jameson's UA-1 Adapter.

UA-1 Universal Tool Adapter

Adapts any manufacturer's universal head tools to Jameson poles.



Part Number	Accessories
WR-1	Wire & Limb Raiser, Fits JE, FG and LS Poles
FG-6-3W	Kit: WR-1 Wire Raiser with Three 6' FG Extension Poles and One 3' FG Extension Pole.
CL-1	Cable Lifter
PPA-1	Pike Pole Adapter
SB-UC	Saw Blade Adapter
UA-1	Universal Tool Adapter
B-6V	Pole Storage Bag

Not For use On Or Near Live Wires



Tree Trimming Accessories

Big Shot

Shoots throw bag and line through tree limbs, delivering line up to 200'. For safety and effectiveness, use the Big Shot with two 4' Jameson poles or one 4' and one 6' pole. We recommend starting with a Base Pole.



Big Shot Carrying Case

Hard case for Big Shot and poles

Hand Lopper



Hawk Bill Knife



Polished, high carbon steel blade is ice-tempered for longer life. Ergonomic handle has an expanded end to protect hand from slipping. 8.5" total length, including 3" blade. Ideal for cutting root balls on plants and trees.

Part Number	Accessories
BS1	Big Shot
BS-CC	Big Shot Carrying Case
FG-BS-KIT1	Big Shot Package: Big Shot, 4' FG Extension Pole, 4' FG Base Pole
HL-BP200	Hand Lopper
32-70-C	Hawk Bill Knife, Charcoal
32-70-O	Hawk Bill Knife, Orange



Safe, Convenient Storage

Jameson's heavy duty bucket mount tool holders offer safe, convenient storage for bucket truck tools. Water repellent and UV resistant, they are designed to withstand extreme weather conditions.



Adjustable clamp bracket allows tool holder to fit any size bucket, with or without liner, and mounts inside or outside bucket.



24-14L
Chainsaw Scabbard with Removable Liner
 Fits standard and hydraulic pistol grip chainsaws. Features a replaceable liner that protects scabbard from chainsaw heat and blade. Adjustable clamp bracket.



24-14A
Chainsaw Scabbard
 Fits standard and hydraulic pistol grip chainsaws. Adjustable clamp bracket



24-18A
Fiberglass Chainsaw Holder
 Features high gloss gel coat finish to prevent fiberglass blooms and splinters. Fits standard and hydraulic pistol grip chainsaws. Adjustable clamp bracket
24-18L Fiberglass Chainsaw Holder with Removable Liner



24-23
Long Reach Chainsaw Holder
 Holds round and oval handled long reach chainsaws and gas powered pole pruners (standard and telescoping) for squirt boom trucks. Fixed mount. 18" X 13"

Part Number	Bucket Mount Tool Holders
24-14A	Chainsaw Scabbard
24-14L	Chainsaw Scabbard with Removable Liner
24-14LIN	Replacement Liner for 24-14L
24-18A	Fiberglass Chainsaw Holder
24-18L	Fiberglass Chainsaw Holder with Removable Liner
24-18LIN	Replacement Liner for 24-18L
24-23	Long Reach Chainsaw Holder - Fixed Mount



24-12A Impact Tool Holder

Features one-piece construction with adjustable clamp bracket. Accommodates most wrenches and drills.

24-12AH Impact Tool Holder with Scabbard

Expanded opening accommodates the most common wrenches and drills. Features two spare drill bit holders and adjustable clamp bracket.



24-15D

Double Pocket Tool Holder

Inner pocket measures 6.25" X 2.25" X 17".
Outer pocket measures 5.25" X 12.5" X 15"
Accommodates a variety of tools. Drain holes for moisture escape.



24-25 Tool Board

Leather tool pouches and drop-in loops. Fixed bucket mount. 22.5" X 18"



24-17 Tool Tray

Features removable dividers and fixed bucket mounts. 23" X 14" X 8"

LiteBox® with Charger Base

120 Volt AC Portable Spotlight with 12 Volt charger base, mounting rack and shoulder strap. Rechargeable up to 500 times.

24-16HP LiteBox® 20 Watt Halogen, up to 70,000 candle-power output, 3.5 hours run time on full charge.



24-16A LiteBox® Holder

Adjustable clamp bracket. Fits all Streamlight LiteBox® and Vulcan models.

Part Number	Bucket Mount Tool Holders
24-12A	Impact Tool Holder
24-12AH	Impact Tool Holder with Scabbard
24-15D	Double Pocket Tool Holder
24-17	Tool Tray
24-16A	LiteBox® Holder
24-16HP	20 Watt LiteBox® with Charger Base
24-25	Tool Board with Leather Tool Pouches



Store Tools Outside The Bucket

Take the tools out of the bucket and mount them on the boom for safe, convenient access. Made from high impact plastic, Jameson's boom-mount tool holders can be strapped to round or square booms.



24-02 Circular Saw Holder
12" X 9"



24-04 Hydraulic Pruner Holder
12" X 13"



Long Reach Chainsaw Holder

24-03F Fits Greenlee Fairmont Style Long Reach Chainsaw
32" X 5"



Boom Guard (24-03GUARD)

Protects boom from saw damage. Mount on boom in front of tool holder to avoid damaging boom when inserting tool into holder.
32" X 5"



Handle Unit For Boom Mount Tool Holders

All boom mount tool holders include the Jameson Handle Unit. This web strap and ratchet lock clamp fasten the hydraulic tool securely into a fixed position on the boom. Its rubberized liner prevents the tool handle from sliding out of the upper holder box. Fits round and square booms.



24-09R Nylon Strap with Ratchet



24-08R Handle

Part Number	Boom Mount Tool Holders
24-02	Circular Saw Holder with Locking Straps & Handle
24-04	Hydraulic Pruner Holder with Locking Straps & Handle
24-03F	Long Reach Chainsaw Holder with Locking Straps & Handle <i>Fits Greenlee Fairmont</i>
24-03GUARD	Boom Guard
300-B	Silica Gel - Use in boom to absorb moisture
Replacement Parts	
24-04R	Replacement Handle Unit (Handle, Strap & Ratchet)
24-08R	Handle Only
24-09R	5' Nylon Strap with Ratchet
24-02B	Saw Box with Strap & Ratchet
24-03B	Chainsaw Box with Strap & Ratchet
24-04B	Pruner Box with Strap & Ratchet



Store and Organize Small Tools

Jameson tool bags feature reinforced sides and base to prevent sagging or water retention.

Available with inner and/or outer organizer pockets, bags can be mounted from the bucket with a rope hook or one of Jameson's high strength polymer "S" hooks.



24-41 Bag Only

24-41S Bag & Two S Hooks

15 Outside Pockets, Rope with Swivel Hook, Reinforced Hard Plastic Base, 2 Grommets for S Hooks 15" X 7" X 10"



2"

3"



24-01

24-11

S-Hooks attach canvas bags to aerial bucket lip. Molded from rugged, weather resistant polymer.



24-40 Bag Only

24-40S Bag & Two S-Hooks

15 Inside Pockets, 2 Grommets for Hooks 15" X 7" X 10"



24-42 Bag Only

24-42S Bag & Two S Hooks

13 Outside Pockets, Web Handles 2 Grommets for S Hooks 15" X 7" X 10"



33-04

B Canvas Nut & Bolt Bag 10" X 9.5"



33-03

Heavy Duty Junk Bag with Reinforced Seams and Carrying Handles, 25" X 16"



33-15

MAPP Gas Bag 12" X 6"



33-16

Worthington Gas Bag 17" X 8"

Making Cable Placement Easier

With guidance from professional linemen, Jameson developed cable placement tools for fiber optic and coaxial cable installation and maintenance. Working from the ground or in the air, our tools make cable construction easier and safer.



Corner Blocks

Corner blocks evenly distribute pressure on coax or fiber cable when pulling around corners. They feature steel side plates with a straight base that acts as a strut for increased strength.

The 60 degree model offers more versatility than the standard 45 degree blocks of other systems.

For greater options, steel side plates can be replaced in the field and all Jameson corner blocks are interchangeable with alternative set-up brackets. Component parts for 60 and 90 degree blocks are fully interchangeable. Nylon axle bushings provide easier swivel and longer axle life.

Adjustable keeper arm holds cable in place as it is pulled through corner block.



90 Degree	60 Degree	Corner Blocks with One Row Aluminum Rollers
80-591A	80-161-A	Corner Block - Single
80-592A	80-162-A	Corner Block - Dual
80-594A	80-164-A	Corner Block - Quad

90 Degree	60 Degree	Corner Blocks All Nylon Rollers
80-591	80-161	Corner Block - Single
80-592	80-162	Corner Block - Dual
80-594	80-164	Corner Block - Quad

Aluminum rollers reduce friction, preventing potential heat build up and damage to synthetic rollers



Pole Mount Brackets

Designed to save vertical space on crowded joint occupied poles, brackets are ideal for mounting corner blocks on the pole.

The nylon strap and ratchet make Jameson pole-mount brackets easy to use and the bracket is contoured to fit pole for maximum stability.

Ratchet strap will not damage existing cables and weighs less than chain straps. Can be adjusted to work from right or left hand side for convenient operation.



70-101
Use With Single Row
Corner Block



70-102
Use With Dual Row
Corner Block



70-104
Use With Quad Row
Corner Block



Easy Rider™

Jameson overlap blocks are economical and lightweight, yet the high strength steel frame maintains cable alignment.

Easily snaps over a strand and cable package up to 2.25" in diameter. The 1.5" width provides convenient stacking when pushed by lasher.

Features a high, rounded bonnet to prevent block kicking under lasher. Stacks evenly. Non-binding roller axle allows rollers to "ride easily" and rotate smoothly.



90-400A
Easy Rider™ with Aluminum Roller



90-400
Easy Rider® with Nylon Roller



Versa™ Blocks



90-100
Versa™ Block with Rubber Roller
For up to 1.5" cables.



90-100A
Versa™ Block with Aluminum Roller
For up to 2.5" diameter cable or bundles and winch lines.

Versa™ Blocks offer the versatility of stringing cable at mid-span on new and existing overlap construction. They are ideal for easy cable placement from aerial buckets or the ground when used with Jameson lay-up sticks and wire raising tool.

Low profile frame reduces cable damage as it passes through block and the wide keeper arm opening accommodates up to 3" cable bundles when used as overlap block.

Part Number	Stringing Blocks
90-400	Easy Rider® Overlash Block with Nylon Roller
90-400-A	Easy Rider® Overlash Block with Aluminum Roller
90-100	Versa™ Block with Rubber Roller
90-100-A	Versa™ Block with Aluminum Roller




Non-conductive fiberglass poles offer fast, accurate one-person measuring of height clearances and horizontal distances. All measuring poles include carrying bag and removable hook accessory. Ideal for overhead lines, telecommunications, railroad, CATV, bridges and structures.



Round Telescoping Measuring Poles

- Available in 25' or 36' length
- Eye level measurement reading
- Lightweight, portable with positive locking buttons

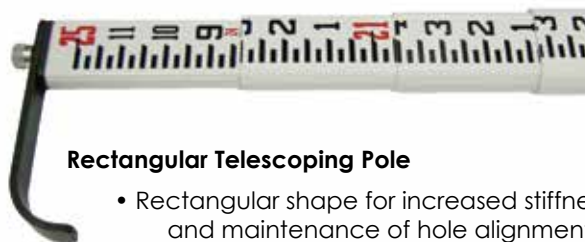

Rectangular Telescoping Pole

- Rectangular shape for increased stiffness and maintenance of hole alignment
- Oversized, glare-resistant reading scale



Oval Telescoping Measuring Pole

- Oval shape for easy grip
- Large locking buttons for increased stability
- Large markings for easier visibility

Part Number	Retracted Length	Measuring Poles
TP-125M	52"	25' Round Telescoping Measuring Pole, 5-Lb, English and Metric Measure
TP-136M	59"	36' Round Telescoping Measuring Pole, 7-Lb, English and Metric Measure
TP-25MH	66"	25' Rectangular Telescoping Measuring Pole, 7-Lb, English Measure Only
TP-125N	58"	25' Oval Telescoping Measuring Pole, 5-Lb, English Measure Only
TP-25HK		Replacement Hook for Measuring Pole

Pole Tag

Pole Tag

For outside plant pole record systems



Part Number	Aerial Tools
GTS2	Pole Tags for continuing property records




Fluorescent and LED Lighting For Commercial, Construction, Mining and Military Markets

In the 1980s Jameson developed work lights for the telecommunications market. The first lighting manufacturer to use electronic ballast technology, our work lights are flicker-free and do not interfere with tone test equipment.

With their compact, durable design, Jameson's Handi® and Stubby® lights are ideal for electrical closets, manholes, aerial buckets, and garages.

In 2000 Jameson's stringable fluorescent lights revolutionized expeditionary shelter lighting. More lightweight and efficient than legacy models, String Lights have been fielded across all branches of the military.

Today, Cero® lights are a part of the Jameson line, offering highly engineered LED lighting for rugged environments such as mining, heavy construction equipment and marine applications.

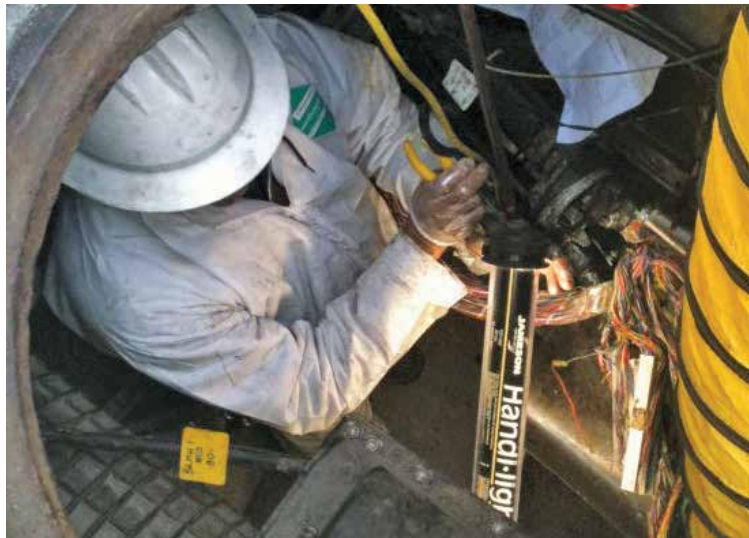



**STUBBY
LIGHT®**



Compact, High Intensity Lighting For Small Workspaces

Twin fluorescent lamps are protected by patented bulb sockets, end caps and handles designed to absorb impact in addition to a shatterproof tube.

Electronic ballast technology offers:

- Eliminates cumbersome starter canisters
- Reduced heat output
- Flicker free lighting
- Does not interfere with tone test equipment

Meets ASTM specifications for water resistance.

Part Number	Stubby Light® 110 Volt Lights	Power Cord Length	Weight (Lbs)
31-1325E	13 Watt	25'	2.7
31-1350E	13 Watt	50'	4.5
31-2425E	24 Watt	25'	3.6
31-2450E	24 Watt	50'	5.3
31-3625E	36 Watt	25'	4.0
31-3650E	36 Watt	50'	5.8
31-5025E	50 Watt	25'	4.2
31-5050E	50 Watt	50'	5.9



Two large, flexible hanging hooks come standard on 50, 36 and 24 watt lights. 13 watt light has one hanging hook.

12 Volt Stubby® Light

Fluorescent Battery Powered Light

Ideal for emergency applications when power is not available; equipment rooms or basements where water is a concern; utility and supervisor vehicles.

- 13 watt Stubby Light® with 10' coiled cord and plug adapter
- Operates off battery pack or direct 12 volt power source
- Battery Pack features "Smart Charger" that prevents overcharging
- Battery housed in nylon pouch on adjustable belt



Part Number	Rechargeable Battery Pack Light
31-131012VCC	13 Watt Light with 10' Coil Cord and Plug Adapter
31-BP-SC	12 Volt, 7.4 Ah Battery Pack with 110V Charger. Operates light 7 hours
31-1310-BP-SC	13 Watt Light with 7.4 Ah Battery Pack (31-BP-SC)



Handi-Light® Heavy Duty Work Lights

Bright, Durable Lighting

Single fluorescent lamp is protected by patented bulb sockets, end caps and handles designed to absorb impact in addition to a shatterproof tube.

Electronic ballast technology offers:

- Eliminates cumbersome starter canisters
- Reduced heat output
- Flicker free lighting
- Does not interfere with tone test equipment

Meets ASTM specifications for water resistance.

Handi•light®



Two large, flexible hanging hooks come standard on all Handi-light models

Part Number	Handi•Light® 110 Volt Lights	Power Cord Length	Weight (Lbs)
30-1525E	15 Watt, 110 Volt	25'	3.3
30-1550E	15 Watt, 110 Volt	50'	5.1
30-3025E	30 Watt, 110 Volt	25'	4.1
30-3050E	30 Watt, 110 Volt	50'	6.0
30-4025E	40 Watt, 110 Volt	25'	6.6
30-4050E	40 Watt, 110 Volt	50'	8.7

Stubby® and Handi•Light® Accessories

Inverter

Operates light off vehicle's 12 Volt DC power source



Vinyl Carry Bag

Protects and transports light



Part Number	Accessories
23-15	29" Vinyl Carry Bag
23-30	46" Vinyl Carry Bag
23-40	60" Vinyl Carry Bag
29-01	12 Volt DC Inverter



**STUBBY
LIGHT® LED**

LED Handheld Work Light

To meet the demand for greener lighting, Jameson developed LED work lights with the same design durability of the fluorescent models. The LED technology resulted in reduced power consumption and a longer life.

- Compact design
- Convenient flexible hanging hook.
- Shock-absorbing handle and end cap combined with shatter-proof tube shield for rugged durability.

LED Light, 12 Volt

8 Watt
12 VDC (5-14 VDC Range)
10' Heavy Duty Coil Cord with Plug Adapter
for use with Jameson Battery Pack or Vehicle
Power Source.
Light: 15" X 3.25"



LED Light, AC Powered

10 Watt
120 - 240 VAC, 50/60 Hz
Light: 15" X 3.25"



Part Number	LED Work Lights
31-825-LED	LED Light, AC Powered, 25' Power Cord
31-850-LED	LED Light, AC Powered, 50' Power Cord
31-12VDC-LED	LED Light, 12 Volt
31-BP-12VDC	Kit: 12 Volt Light with Battery Pack

Halogen Work Light



**Halogen Work
Light 29-500H3S**

LED Flashlight

With 12 energy-saving bright LEDs, this compact flashlight is weatherproof and shock resistant.

- Flat base allows flashlight to be set on end for hands-free operation
 - Operates on three AAA batteries (included)
 - Sealed rubber switch and carrying strap
- 4.5" H X 3.75" Diameter



**Flashlight
31-FL-10**




**Pouch
31-FL-10P**

Stringable Lights

Ideal for emergency, first responder, military or new construction applications that require portable lighting.

Use an individual light to illuminate a confined space or string lights together to illuminate a larger area.

- CE approved; available in a variety of international plug configurations (as well as standard US plugs)
- CSA approved for use in Canada
- On/off switch
- 12+ lights can be strung together without tripping 5 mA GFCI

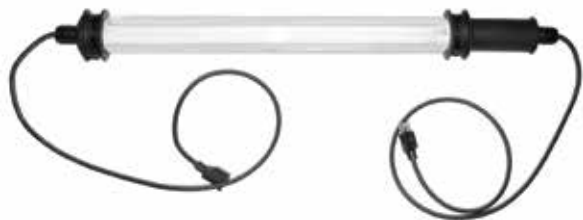

General Purpose Fluorescent String Lights

- 50 Watt, 110 VAC, 50/60 Hz



STRING LIGHT



LED String Lights

- Long life, Low Power Consumption
- Dimming And Black-Out Capabilities



Part Number	String Lights and Accessories
31-5004M-IP	General Purpose String Light, 110 Volt, 2 Hanging Straps
31-501-US	Multi-Volt String Light, 110-230 Volt, 2 Hanging Straps
31-400B	LED String Light
23-30-B	Vinyl Carry Bag - Holds 2 Lights
31-MC	Transport Case - Holds 4 Lights

Specialized military lights available.
Contact our customer service department
to request a Military Lighting Catalog or visit
WWW.JAMESONLLC.COM

Cero® LED Heavy Equipment Lights

Mining - Construction - Marine - Agriculture
Heavy Equipment - Wide Area



XD Extreme Duty Lights

Designed For Rugged Environments Requiring High Shock Handling Capabilities

Over two years of testing went into making Cero® XD's the ultimate work light. Designed for rugged environments, these lights feature the XD-Lock™ system to protect the lamp during extreme high vibration applications.

- Extreme Vibration Durability
- Extreme Shock Handling
- Dimming Capability
- Versatile Mounting

Two-bolt XD-Lock® mounting system isolates lamp housing from mounting bracket for high frequency vibration dampening.

Lumens: 4,000 - 7,240

Operating Voltage: 10-32VDC or 18-32VDC

XD-9 model - 9 LEDs 3.9" X 3.9" X 2.65"

XD-16 model - 16 LEDs 4.5" X 4.5" X 2.8"



CERO.
XD



HD Heavy Duty Lights

Direct Replacement For Most Standard Equipment

A direct replacement light for most standard equipment, Cero HD Lights are designed for quick integration and improvement to OEM lights on tracked equipment.

With little or no hot/dark spots to distract the operator, the HD provides smooth, high-contrast lighting for a large area.

An integrated shock damping system absorbs high-frequency vibration.

- Versatile Mounting
- Angled Lighting
- Large Perimeter Lighting
- Little or No Hot or Dark Spots To Distract Operator
- Heavy Duty Shock/Vibration Handling

Lumens: 3,890 - 42,660

Operating Voltage: 10-32VDC or 18-32VDC

HD-16 model with 16 LEDs 4.5" X 4.5" X 2.7"

HD-32 model with 32 LEDs 8" X 4.9" X 2.7"

HD-80 model with 80 LEDs 18.5" X 6" X 2.9"



CERO.
HD



XD and HD Lights - The Cero® Difference



Long-life LED lighting overpowers typical metal halide or sodium lamps while consuming less than half the power, greatly decreasing the cost of energy to operate.

- Corrosion Resistant Anodized Aluminum Housing
- Corrosion Resistant Stainless Steel Mounting Hardware and Brackets
- Gold Plated Circuit Board and Connector Contacts for Electrical Properties and Corrosion Resistance
- Advanced Thermal Management Extends LED Life By Keeping LEDs Cool
- Waterproof To IP69K (High Pressure, High Temperature Spray)
- Reverse Polarity Protection
- Transient Voltage Protection



LED Options
Natural White, Warm White, Amber, Red Orange

Beam Pattern Options

Spot
Medium
Horizontal Elliptical
Vertical Elliptical
Wide Beam
Trapezoid

Alpha-Numeric Identification Displays

Designed to offer the highest level of reliability, the IDX display panel has a hardened borosilicate lens option, dual o-ring seals, a billet aluminum chassis, and gold plated mil-spec connector.

CERO
IDX



IDX1



IDX2



IDX3



LED Options
Yellow, Blue, Green, Red

Model	LEDs	Raw Lumens	Effective Lumens	Wattage Options	Operating Voltage	LED Colors	Housing Dimensions	Tilt Angles
XD-9	9	4,780	4,000	45	10-32VDC 18-32VDC	Natural White Warm White Red Orange Amber	3.9" X 3.9" X 2.6" 99 mm X 99mm X 67.3mm	-20° - +40°
XD-16	16	5,160 - 8,640	4,320 - 7,240	85, 55, 35, 25	10-32VDC 18-32VDC		4.5" X 4.5" X 2.8" 114.3 X 114.3 X 71.12mm	-20° - +40°
HD-16	16	4,750 - 7,700	3,890 - 6,300	85, 55, 35, 25	10-32VDC 18-32VDC		4.5" X 4.5" X 2.7" 114mm X 114mm X 68.5 mm	360° -20° - +40°
HD-32	32	9,500 - 15,560	7,500 - 12,300	170, 110, 70, 50	10-32VDC 18-32VDC		8" X 4.9" X 2.7" 203.2mm X 124.4mm X 68.5mm	-20° - +40°
HD-80	80	31,600 - 42,660	24,800 - 33,480	415, 270	18-32VDC 90-305VAC		18.5" X 6" X 2.9" 469.9mm X 152.4mm X 73.66mm	-70° - +20°
IDX Alpha Numeric Identification Displays								
IDX		Two Switchable Brightness Presets	1-3 Characters	Custom Characters	9-32VDC	Yellow Blue Green Red White	One Character 12.8" X 19.8" X 1.3" 325 X 503 X 33mm Two Character 25.5" X 19.8" X 1.3" 648 X 503 X 33mm Three Character 40.3" X 19.8" X 1.3" 1024 X 503 X 33mm	

Contact Jameson's Customer Service Department For Assistance With Specific Applications Or Customized Lighting

Part Number	Product Group	Replacement Part
24-02B	Bucket Boom	Saw Box and Lock/Strap
24-04R	Bucket Boom	Replacement Handle With Strap, Ratchet for Boom Tool Holder
24-08R	Bucket Boom	Handle Only for Boom Tool Holders
24-09R	Bucket Boom	Nylon 5' Strap with Ratchet
10-150RO	Buddy Fish Tape	Little Buddy - Rod Only 3/16" X 150'
10-18-350MDRO	Buddy Fish Tape	Microduct 350' X 1/8" Rod Only
10-200RO	Buddy Fish Tape	Little Buddy - Rod Only 3/16" X 200'
10-300RO	Buddy Fish Tape	Little Buddy - Rod Only 3/16" X 300'
11-10	Buddy Rodder	Big Buddy Rod End Clamp
11-1000ROM	Buddy Rodder	Big Buddy - Rod Only 1/2" X 1000'
11-100ROM	Buddy Rodder	Big Buddy - Rod Only 1/2" X 100'
11-15	Buddy Rodder	Big Buddy - Wheel & Axle
11-2	Buddy Rodder	Big Buddy Replacement Reel
11-200ROM	Buddy Rodder	Big Buddy - Rod Only 1/2" X 200'
11-38-RI	Buddy Rodder	Big Buddy Frame and Canister
11-5	Buddy Rodder	Big Buddy Feed Roller Kit
11-500ROM	Buddy Rodder	Big Buddy - Rod Only 1/2" X 500'
11-600ROM	Buddy Rodder	Big Buddy - Rod Only 1/2" X 600'
11-800ROM	Buddy Rodder	Big Buddy - Rod Only 1/2" X 800'
11A-15	Buddy Rodder	Good Buddy II Wheel and Axle Kit
11A-2	Buddy Rodder	Good Buddy II Replacement Reel
11A-25-RI	Buddy Rodder	Good Buddy II Frame and Canister
6-14-RI	Buddy Rodder	Easy Buddy Frame & Reel
6-15	Buddy Rodder	Easy Buddy Wheels and Axle
6-300ROM	Buddy Rodder	Easy Buddy - Rod Only 1/4" X 300'
6-400ROM	Buddy Rodder	Easy Buddy - Rod Only 1/4" X 400'
6-5	Buddy Rodder	Feed Roller for Easy Buddy
6-500ROM	Buddy Rodder	Easy Buddy - Rod Only 1/4" X 500'
9-100ROM	Buddy Rodder	Good Buddy - Rod Only 3/8" X 100'
9-2	Buddy Rodder	Good Buddy Replacement Reel
9-25-RI	Buddy Rodder	Good Buddy Frame and Canister
9-300ROM	Buddy Rodder	Good Buddy - Rod Only 3/8" X 300'
9-400ROM	Buddy Rodder	Good Buddy - Rod Only 3/8" X 400'
9-500ROM	Buddy Rodder	Good Buddy - Rod Only 3/8" X 500'
15-200RO	Duct Hunter Fisher	Mini Rod Only 3/16" X 200'
15-250RO	Duct Hunter Fisher	Mini DH Rod Only 3/16" X 250'
15-300RO	Duct Hunter Fisher	Mini DH Rod Only 3/16" X 300'
9-600ROM	Buddy Rodder	Good Buddy - Rod Only 3/8" X 600'
9A-15	Buddy Rodder	Good Buddy III Wheel and Axle Kit
9A-25-RI	Buddy Rodder	Good Buddy III Frame Assembly
9-ACA	Buddy Rodder	Good Buddy III Axle Assembly
9-LAK	Buddy Rodder	Good Buddy Legs and Axle Kit
15-100RO	Duct Hunter Fisher	Mini DH Rod Only 3/16" X 100'
15-150RO	Duct Hunter Fisher	Mini DH Rod Only 3/16" X 150'
15-200RO	Duct Hunter Fisher	Mini DH Rod Only 3/16" X 200'
15-250RO	Duct Hunter Fisher	Mini DH Rod Only 3/16" X 250'
15-300RO	Duct Hunter Fisher	Mini DH Rod Only 3/16" X 300'

Part Number	Product Group	Replacement Part
12-150RO	Duct Hunter Rodder	Duct Hunter Rod Only 150' X 5/16"
12-300RO	Duct Hunter Rodder	Duct Hunter Rod Only 300' X 5/16"
12-300ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 300' X 5/16"
12-400RO	Duct Hunter Rodder	Duct Hunter Rod Only 400' X 5/16"
12-400ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 400' X 5/16"
12-500RO	Duct Hunter Rodder	Duct Hunter Rod Only 500' X 5/16"
12-500ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 500' X 5/16"
12-600RO	Duct Hunter Rodder	Duct Hunter Rod Only 600' X 5/16"
12-600ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 600' X 5/16"
12-700RO	Duct Hunter Rodder	Duct Hunter Rod Only 700' X 5/16"
12-700ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 700' X 5/16"
12-800RO	Duct Hunter Rodder	Duct Hunter Rod Only 800' X 5/16"
12-800ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 800' X 5/16"
13-400RO	Duct Hunter Rodder	Duct Hunter Rod Only 400' X 7/16"
13-400ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 400' X 7/16"
13-500RO	Duct Hunter Rodder	Duct Hunter Rod Only 500' X 7/16"
13-500ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 500' X 7/16"
13-600RO	Duct Hunter Rodder	Duct Hunter Rod Only 600' X 7/16"
13-600ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 600' X 7/16"
13-700RO	Duct Hunter Rodder	Duct Hunter Rod Only 700' X 7/16"
13-700ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 700' X 7/16"
13-800RO	Duct Hunter Rodder	Duct Hunter Rod Only 800' X 7/16"
13-800ROM	Duct Hunter Rodder	Duct Hunter Rod Only Marked 800' X 7/16"
30-1-15	Lighting	15 Watt Replacement Lamp Kit
30-1-15-PKG	Lighting	15 Watt Replacement Kit, 6 Pack
30-1-30	Lighting	30 Watt Replacement Lamp Kit
30-1-30-PKG	Lighting	30 Watt Replacement Kit, 6 Pack
30-1-40	Lighting	40 Watt Replacement Lamp Kit
30-2-30	Lighting	30 Watt Tube and Label Kit
30-2-40	Lighting	40 Watt Tube and Label Kit
31-1-13	Lighting	13 Watt Replacement Lamp Kit
31-1-13-PKG	Lighting	13 Watt Replacement Kit, 6 Pack
31-1-24	Lighting	24 Watt Replacement Lamp Kit
31-1-24-PKG	Lighting	24 Watt Replacement Kit, 6 Pack
31-1-36	Lighting	36 Watt Replacement Lamp Kit
31-1-36-PKG	Lighting	36 Watt Replacement Kit 6 Pack
31-1-50	Lighting	50 Watt Replacement Lamp Kit
31-1-50-PKG	Lighting	50 Watt Replacement Kit 6 Pack
31-1-36-PKG	Lighting	36 Watt Replacement Kit 6 Pack
31-1-50	Lighting	50 Watt Replacement Lamp Kit
31-1-50-PKG	Lighting	50 Watt Replacement Kit 6 Pack



Replacement Parts

Part Number	Product Group	Replacement Part
31-2-13	Lighting	13 Watt Tube and Label Kit
31-2-24	Lighting	24 Watt Tube and Label Kit
31-2-36	Lighting	36 Watt Tube and Label Kit
31-2-50	Lighting	50 Watt Tube and Label Kit
31-RHK	Lighting	Light Hanger Hook Kit
15-100RO-GW	Live Tracer	Gas, Water Tracer Rod Only 3/16"X100'
15-150RO-GW	Live Tracer	Gas, Water Tracer Rod Only 3/16"X150'
15-170-GL	Live Tracer	Stuffing Box O-Rings (12 pack)
15-200RO-GW	Live Tracer	Gas, Water Tracer Rod Only 3/16"X200'
15-250RO-GW	Live Tracer	Gas, Water Tracer Rod Only 3/16"X250'
15-300RO-GW	Live Tracer	Gas, Water Tracer Rod Only 3/16"X300'
PS-RP-LF	Pole Saws	PS-3 Hardware - Lower/Centred-10 PK
PS-RP-LP	Pole Saws	PS-3 Hardware - Lower Pin-10 PK
PS-RP-U	Pole Saws	PS-3 Hardware - Upper-10 PK
FG-F	Poles	Female Ferrule with Spring
FG-M	Poles	Male Ferrule for 1-1/4" Poles
FG-MF	Poles	Set of Ferrules - Male & Female
FG-SC	Poles	Spring and Clip for Ferrule
PHA-34DP	Pruners - JA	Adapter for Big Mouth Double Pulley Pruner. Adapter includes pulley.
JAY102	Pruners - JA	JA-14 Pruner - Lever w/Lower Spring Pin
JAY104R	Pruners - JA	JA-14 Pruner - Casting
JAYY101A	Pruners - JA	JA-14 Pruner - JHook
JAZ101	Pruners - JA	JA-14 Pruner - Blade with Upper Pin
JAZ103	Pruners - JA	JA-14 Pruner - Link
JAZ104	Pruners - JA	JA-14 Pruner - Spring
JAZ105	Pruners - JA	JA-14 Pruner - Cap Screw & Nut
JAZ106	Pruners - JA	JA-14 Pruner - Upper Spring Pin
JAZ108	Pruners - JA	JA-14 Pruner - Link Pin
JAZ110	Pruners - JA	JA-14 Pruner - Lower Spring Pin/2 Rings
JAZ111A	Pruners - JA	JA-14 Pruner - Lever Block
JAZ114	Pruners - JA	JA-14 Pruner - Lever Nut
JAZ115	Pruners - JA	JA-14 Pruner - Pulley Assembly
JAZ115S	Pruners - JA	JA-14S Pulley Assembly- Swivel

Part Number	Product Group	Replacement Part
JAZ116	Pruners - JA	JA-14 Pruner - Pulley Trunnion Pin
JAZ117A	Pruners - JA	JA-14 Pruner - Pole Bolt & Nut
JAZ123	Pruners - JA	JA-14 Pruner - Blade Bolt Nut, Nylon Ins
JAZ124	Pruners - JA	JA-14 Pruner - Block Bolt & Nut
JAZ130	Pruners - JA	JA-14 Pruner - Rivet
JBM101	Pruners - JA	JA-34 Pruner - Blade
JBM104	Pruners - JA	JA-34 Pruner - Spring
JBM106A	Pruners - JA	JA-14 Pruner Spring Pin Kit: Pin & Nut, Upper
JBM108	Pruners - JA	JA-34 Pruner - Link Pin
JBM110	Pruners - JA	JA-34 Pruner - Lower Spring Pin
JE-F	Pruners - JA	Female Ferrule And Leaf Spring
JE-M	Pruners - JA	Male Ferrule With Screw & Nut
PHA-34DP	Pruners - JA	JA-34DP Pruner Adapter
PH-11-BLADE	Pruners - PH	PH-11 Pruner Replacement Blade
PH-11-BOLT	Pruners - PH	PH-11 Pruner - Pivot Bolt
PH-11-CHAIN	Pruners - PH	PH-11 Pruner - Chain
PH-11-PULLEY	Pruners - PH	PH-11 Pruner- Pulley
PH-11-SPRING	Pruners - PH	PH-11 Pruner - Spring
PH-12-ARM	Pruners - PH	PH-12 Pruner R- Arm (10-Pack)
PH-12-CHAIN	Pruners - PH	PH-12 Pruner - Chain (10-Pack)
PH-12-RODS	Pruners - PH	PH-12 Pruner - Rods 10-Pack (20 rods)
PH-12-SPRINGS	Pruners - PH	PH-12 Pruner - Springs 10-Pack (20 springs)



Clover, South Carolina 29710
800.346.1956 803.222.6400
sales@jamesonllc.com
WWW.JAMESONLLC.COM

JCAT_V14